



2023 PRODUCT CATALOG

MILESTAR[®] TIRES

MILESTAR TIRES are developed with a focus on outstanding quality and high performance. Offering a wide product assortment in Passenger, High Performance, Ultra-High Performance, Light Truck, and Commercial Medium Radial Truck applications; Milestar options cover the needs of the tire replacement market.

Owned and marketed by Tireco, Inc., a U.S.-based private brand marketer and distribution company. Founded in 1972, Tireco, Inc. has become an industry leader in consumer, commercial, and specialty tires, as well as towable and custom wheel products.

Today, Tireco, Inc. is headquartered in Gardena, CA and has an extensive network of national dealer/distributors and operates one of the country's largest tire warehouses located in Fontana, CA. Tireco, Inc. is dedicated to providing dealers with exceptional service and quality products at an outstanding value.

For more information, please visit
www.milestartires.com



TIRE LINEUP

PASSENGER CAR	2
INTERCEPTOR AS810.....	4
WEATHERGUARD AS710 SPORT	6
WEATHERGUARD AW365	8
MS932 SPORT	10
STREETSTEEL	12
MS775 TOURING SLE	14
MS70 ALL-SEASON	16
LIGHT TRUCK / SUV	18
PATAGONIA M/T-02.....	20
PATAGONIA X/T	22
PATAGONIA A/T PRO	24
PATAGONIA A/T R	26
PATAGONIA H/T	28
UTV / SIDE-BY-SIDE	30
PATAGONIA SXT / SXS.....	32
COMMERCIAL LT / VAN	34
STEELPRO MS597	36
STEELPRO MS597S	38
STEELPRO AST	40
WARRANTY INFORMATION	42
MILEAGE WARRANTY INFORMATION	44
30 DAY RIDE GUARANTEE PROGRAM	46
ROAD HAZARD PROGRAM	47

PASSENGER TIRE PRODUCT LINE-UP



INTERCEPTOR AS810

ULTRA-HIGH PERFORMANCE
ALL-SEASON



**WEATHERGUARD
AS710 SPORT**

ALL-SEASON
PERFORMANCE



**WEATHERGUARD
AW365**

ALL-WEATHER
PERFORMANCE



MS932 SPORT

ALL-WEATHER
PERFORMANCE



STREETSTEEL

CLASSIC
PERFORMANCE



MS775 TOURING SLE

ALL-SEASON
TOURING



MS70 ALL-SEASON

ALL-SEASON
TOURING

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

INTERCEPTOR AS810

· ULTRA-HIGH PERFORMANCE ALL-SEASON · PASSENGER

The all-new INTERCEPTOR AS810 is an ultra-high performance tire designed for optimal performance all year long. The optimized inside tread pattern includes a multitude of features designed to maximize the driving experience during dry and wet conditions. The large outside shoulder tread blocks increase cornering stability for improved handling, while micro siping provides stability and all-season driving confidence. Backed by a 50K Mile Limited Warranty, the AS810 delivers the best balance of performance and value.

50K
MILE LIMITED
WARRANTY

500AA
UTQG



PERFORMANCE RATINGS*



MILETECH® ADVANCED S-COMPOUND
Formulated with advanced silica to deliver maximum control and high-performance driving year-round.



ULTRA-HIGH PERFORMANCE
Ultra-high performance, asymmetrical tread design provides improved wet and dry traction in all seasons.



ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



DRY TRACTION
Performance-enhanced tread design for improved handling in dry conditions.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
17"	205/50R17	-	93W	-	XL	-	-	-	-	-	-	-	-
	215/45ZR17	24975028	91W	BW	XL	10/32	7.00	7.00 - 8.00	8.4	24.6	1356@49	21.6	500AA
	225/45ZR17	24977042	94Y	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.0	1477@49	23.3	500AA
	225/50R17	-	98W	-	XL	-	-	-	-	-	-	-	-
	225/40ZR18	24077033	92Y	BW	XL	10/32	8.00	7.00 - 9.00	9.1	25.1	1389@49	23.3	500AA
18"	225/45ZR18	24990017	95Y	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.9	1521@49	24.4	500AA
	235/40R18	-	95Y	-	XL	-	-	-	-	-	-	-	-
	235/45ZR18	24998010	98Y	BW	XL	10/32	8.00	7.00 - 8.50	9.3	26.3	1653@50	26.8	500AA
	245/35R18	-	92Y	-	XL	-	-	-	-	-	-	-	-
	245/40ZR18	24082023	97Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	25.7	1609@49	26.9	500AA
	245/45ZR18	24995020	100Y	BW	XL	10/32	8.00	7.50 - 9.00	9.6	26.7	1764@50	28.5	500AA
	255/35R18	-	64Y	-	XL	-	-	-	-	-	-	-	-
	255/40R18	-	99Y	-	XL	-	-	-	-	-	-	-	-
	265/35R18	-	97Y	-	XL	-	-	-	-	-	-	-	-
	275/35R18	-	99Y	-	XL	-	-	-	-	-	-	-	-
	285/35R18	-	101Y	-	XL	-	-	-	-	-	-	-	-
	19"	225/40R19	-	93Y	-	XL	-	-	-	-	-	-	-
225/45R19		-	96W	-	XL	-	-	-	-	-	-	-	-
235/35R19		-	91Y	-	XL	-	-	-	-	-	-	-	-
235/40R19		-	96W	-	XL	-	-	-	-	-	-	-	-
235/45R19		-	99W	-	XL	-	-	-	-	-	-	-	-
245/35R19		-	93Y	-	XL	-	-	-	-	-	-	-	-
245/40R19		-	98Y	-	XL	-	-	-	-	-	-	-	-
245/45R19		-	102Y	-	XL	-	-	-	-	-	-	-	-
245/50R19		-	105W	-	XL	-	-	-	-	-	-	-	-
255/35R19		-	96Y	-	XL	-	-	-	-	-	-	-	-
255/40R19		-	100Y	-	XL	-	-	-	-	-	-	-	-
265/35R19		-	98Y	-	XL	-	-	-	-	-	-	-	-
265/50R19		-	110Y	-	XL	-	-	-	-	-	-	-	-
275/35R19		-	100Y	-	XL	-	-	-	-	-	-	-	-
275/40R19		-	105Y	-	XL	-	-	-	-	-	-	-	-
275/55R19	-	111W	-	SL	-	-	-	-	-	-	-	-	
305/30R19	-	102Y	-	XL	-	-	-	-	-	-	-	-	





LARGE SHOULDER TREAD BLOCKS
Increase cornering stability for improved handling.



OPTIMIZED INSIDE TREAD PATTERN
Enhances wet, dry, and winter traction.



ANGLED TREAD NOTCHES
Enhances traction while also reducing noise and improving overall tread life.



MICRO SIPES
Provide stability and traction in both wet and dry conditions.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
20"	225/35R20	-	90Y	-	XL	-	-	-	-	-	-	-	-
	235/35R20	-	92Y	-	XL	-	-	-	-	-	-	-	-
	245/35R20	-	95Y	-	XL	-	-	-	-	-	-	-	-
	245/40R20	-	99Y	-	XL	-	-	-	-	-	-	-	-
	245/45R20	-	103Y	-	XL	-	-	-	-	-	-	-	-
	255/30R20	-	92Y	-	XL	-	-	-	-	-	-	-	-
	255/35R20	-	97Y	-	XL	-	-	-	-	-	-	-	-
	255/40R20	-	101Y	-	XL	-	-	-	-	-	-	-	-
	255/45R20	-	105Y	-	XL	-	-	-	-	-	-	-	-
	265/35R20	-	99Y	-	XL	-	-	-	-	-	-	-	-
	265/45R20	-	108Y	-	XL	-	-	-	-	-	-	-	-
	275/30R20	-	97Y	-	XL	-	-	-	-	-	-	-	-
	275/35R20	-	102Y	-	XL	-	-	-	-	-	-	-	-
	275/40R20	-	106Y	-	XL	-	-	-	-	-	-	-	-
	275/45R20	-	110Y	-	XL	-	-	-	-	-	-	-	-
	285/30R20	-	99Y	-	XL	-	-	-	-	-	-	-	-
285/50R20	-	116W	-	XL	-	-	-	-	-	-	-	-	
305/30R20	-	103Y	-	XL	-	-	-	-	-	-	-	-	
315/35R20	-	110Y	-	XL	-	-	-	-	-	-	-	-	
21"	245/35R21	-	96Y	-	XL	-	-	-	-	-	-	-	-
	265/35R21	-	101Y	-	XL	-	-	-	-	-	-	-	-
	265/40R21	-	105Y	-	XL	-	-	-	-	-	-	-	-
	275/40R21	-	107Y	-	XL	-	-	-	-	-	-	-	-
	275/45R21	-	110Y	-	XL	-	-	-	-	-	-	-	-
22"	295/35R21	-	107Y	-	XL	-	-	-	-	-	-	-	-
	235/30R22	-	90W	-	XL	-	-	-	-	-	-	-	-
	245/30R22	-	92W	-	XL	-	-	-	-	-	-	-	-
	255/30R22	-	95Y	-	XL	-	-	-	-	-	-	-	-
	265/30R22	-	97Y	-	XL	-	-	-	-	-	-	-	-
	265/35R22	-	102W	-	XL	-	-	-	-	-	-	-	-
	285/40R22	-	110Y	-	XL	-	-	-	-	-	-	-	-
	295/25R22	-	97Y	-	XL	-	-	-	-	-	-	-	-
24"	295/30R22	-	103Y	-	XL	-	-	-	-	-	-	-	-
	305/40R22	-	114W	-	XL	-	-	-	-	-	-	-	-
305/35R24	-	112W	-	XL	-	-	-	-	-	-	-	-	



* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

• Coming Soon

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

WEATHERGUARD AS710 SPORT

· ALL-SEASON PERFORMANCE · PASSENGER

The WEATHERGUARD AS710 SPORT redefines all-season performance without sacrificing comfort and noise levels, letting you stay on the road all-year long. Featuring a MILETECH® advanced silica-enriched compound, this tire delivers improved handling, along with enhanced durability in both wet and dry conditions. Optimal tread blocks, variable depth siping, and lateral grooves all allow this tire to perform year-round, with enhanced braking and handling in inclement weather. The AS710 SPORT all-season tire will consistently get you through each season at an amazing value, and is backed by a 70K Mile Limited Warranty for H and V-speed ratings, and 80K miles for T-speed ratings. The ideal tire for coupes, sedans, and CUVs, the AS710 SPORT comes in variety of sizes ranging from 15 to 20 inches, with T, H, and V-speed ratings.

70K/80K*
MILE LIMITED
WARRANTY

580AA
720AA
UTQG



PERFORMANCE RATINGS†

DRY HANDLING



QUIET RIDE



WET PERFORMANCE



FUEL EFFICIENCY



RIDE COMFORT



TREAD LIFE



MILETECH® ADVANCED COMPOUND TECHNOLOGY

Delivers enhanced durability while improving handling in wet conditions.



WET TRACTION

Elaborate siping and enhanced tread design allows for superior water dispersion.



ALL-SEASON

Pattern design and MILETECH® silica compound for year-round driving confidence.



COUPES, SEDANS, AND CUVS

Designed for a variety of today's vehicles, including coupes, sedans, and CUVs.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
15"	185/60R15	24616017	88T	BW	XL	11/32	5.50	5.00 - 6.50	7.4	23.7	1235@51	15.4	720AA
	185/65R15	24525044	92H	BW	XL	11/32	5.50	5.00 - 6.50	7.4	24.5	1389@51	16.1	720AA
	195/60R15	24635044	92H	BW	XL	11/32	6.00	5.50 - 7.00	7.9	24.2	1389@51	16.8	720AA
	195/65R15	24530053	95H	BW	XL	11/32	6.00	5.50 - 7.00	7.9	25.0	1521@51	17.9	720AA
	205/65R15	24540047	99H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	25.5	1709@51	18.7	720AA
	205/55R16	24460048	94H	BW	XL	11/32	6.50	5.50 - 7.50	8.4	24.9	1477@51	18.5	720AA
16"	205/60R16	24653029	96H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	25.7	1565@51	19.4	720AA
	205/65R16	24555011	99H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	26.5	1709@51	23.1	720AA
	215/55R16	24556029	97H	BW	XL	11/32	7.00	6.00 - 7.50	8.9	25.3	1609@51	20.7	720AA
	215/60R16	24655033	99H	BW	XL	11/32	6.50	6.00 - 7.50	8.7	26.1	1709@51	23.1	720AA
	215/65R16	24560026	102T	BW	XL	11/32	6.50	6.00 - 7.50	8.7	27.0	1874@51	23.6	720AA
	215/70R16	24156011	100H	BW	SL	11/32	6.50	5.50 - 7.00	8.7	27.9	1764@51	24.9	720AA
	225/60R16	24665037	102H	BW	XL	11/32	6.50	6.00 - 8.00	9.0	26.6	1874@51	24.9	720AA
	225/65R16	24666007	104H	BW	XL	11/32	6.50	6.00 - 8.00	9.0	27.5	1984@51	24.9	720AA
	225/70R16	24260008	107T	BW	XL	11/32	6.50	6.00 - 7.50	9.0	28.4	2150@51	26.0	720AA
	235/60R16	24675019	104H	BW	XL	11/32	7.00	6.50 - 8.50	9.4	27.1	1984@51	25.8	720AA
	235/70R16	24265019	109T	BW	XL	11/32	7.00	6.00 - 8.00	9.4	29.0	2271@51	28.2	720AA
	17"	205/50R17	24385105	93V	BW	XL	11/32	6.50	5.50 - 7.50	8.4	25.1	1433@51	19.2
215/45R17		24975025	91V	BW	XL	11/32	7.00	7.00 - 8.00	8.4	24.6	1356@51	18.1	580AA
215/50R17		24390155	95V	BW	XL	11/32	7.00	6.00 - 7.50	8.9	25.5	1521@51	19.6	580AA
215/55R17		24470115	98V	BW	XL	11/32	7.00	6.00 - 7.50	8.9	26.3	1653@51	23.1	720AA
215/60R17		24567010	100T	BW	XL	11/32	6.50	6.00 - 7.50	8.7	27.2	1764@51	24.3	720AA
215/65R17		24556901	103T	BW	XL	11/32	6.50	6.00 - 7.50	8.7	28.0	1929@51	24.9	720AA
225/45R17		24977039	94V	BW	XL	11/32	7.50	7.00 - 8.50	8.9	25.0	1477@51	20.3	580AA
225/50R17		24395021	98V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	25.9	1653@51	22.5	580AA
225/55R17		24475023	101V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	26.8	1819@51	24.7	720AA
225/60R17		24685011	103T	BW	XL	11/32	6.50	6.00 - 8.00	9.0	27.6	1929@51	26.0	720AA
225/65R17		24557018	106H	BW	XL	11/32	6.50	6.00 - 8.00	9.0	28.5	2094@51	26.0	720AA
235/45R17		24980026	97V	BW	XL	11/32	8.00	7.50 - 9.00	9.3	25.4	1609@51	22.7	580AA
235/50R17		24400008	96V	BW	SL	11/32	7.50	6.50 - 8.50	9.6	26.3	1565@51	24.9	580AA
235/55R17		24480015	103V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.2	1929@51	26.0	720AA
235/60R17		24552705	106H	BW	XL	11/32	7.00	6.50 - 8.50	9.4	28.1	2094@51	27.6	720AA
235/65R17		24657016	108H	BW	XL	11/32	7.00	6.50 - 8.50	9.4	29.1	2205@51	28.7	720AA
245/45R17		24982015	99V	BW	XL	11/32	8.00	7.50 - 9.00	9.6	25.7	1709@51	24.0	580AA



WIDE CIRCUMFERENTIAL GROOVES

Aid in the evacuation of water to reduce hydroplaning.



LOW ROLLING RESISTANCE

Uses less energy to roll the tire and delivers better fuel economy.



WIDE CIRCUMFERENTIAL RIBS

Improve stability, handling, and lateral grip.



VARIABLE SIPING

Provides consistent traction throughout the life of the tire.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
18"	225/40R18	24077030	92V	BW	XL	11/32	8.00	7.50 - 9.00	9.1	25.1	1389@51	20.9	580AA
	225/45R18	24990014	95V	BW	XL	11/32	7.50	7.00 - 8.50	8.9	25.9	1521@51	22.5	580AA
	225/50R18	24558006	99V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	26.9	1709@51	23.6	580AA
	225/55R18	24559008	102V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	27.8	1874@51	26.2	720AA
	225/60R18	24496807	104H	BW	XL	11/32	6.50	6.00 - 8.00	9.0	28.6	1984@51	26.7	720AA
	235/45R18	24998008	98V	BW	XL	11/32	8.00	7.50 - 9.00	9.3	26.3	1653@51	24.0	580AA
	235/50R18	24410009	101V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.3	1819@51	26.2	580AA
	235/55R18	24496707	104V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	28.1	1984@51	27.1	720AA
	235/60R18	24583210	107V	BW	XL	11/32	7.00	6.50 - 8.50	9.4	29.1	2150@51	29.3	720AA
	235/65R18	24658005	106V	BW	SL	11/32	7.00	6.50 - 8.50	9.4	30.0	2094@51	30.9	720AA
	245/40R18	24082021	97V	BW	XL	11/32	8.50	8.00 - 9.50	9.8	25.7	1609@51	23.8	580AA
	245/45R18	24995018	100V	BW	XL	11/32	8.00	7.50 - 9.00	9.6	26.6	1764@51	25.6	580AA
	245/60R18	24376005	105V	BW	SL	11/32	7.00	7.00 - 8.50	9.8	29.6	2039@51	31.1	720AA
	255/65R18	24627004	115T	BW	XL	11/32	7.50	7.00 - 9.00	10.2	31.1	2679@51	33.1	720AA
19"	225/55R19	24988006	99V	BW	SL	11/32	7.00	6.00 - 8.00	9.2	28.8	1709@51	27.6	720AA
	235/40R19	24851004	96V	BW	XL	11/32	8.50	8.00 - 9.50	9.5	26.4	1565@51	24.9	580AA
	235/55R19	24497005	105V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	29.2	2039@51	29.1	720AA
	245/40R19	24083106	98V	BW	XL	11/32	8.50	8.00 - 9.50	9.8	26.7	1653@51	26.5	580AA
	255/60R19	24628003	113H	BW	XL	11/32	7.50	7.00 - 9.00	10.2	31.1	2535@51	33.3	720AA
20"	235/55R20	24498004	105V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	30.2	2039@51	30.9	720AA
	245/45R20	24087007	103V	BW	XL	11/32	8.00	7.50 - 9.00	9.6	28.7	1929@51	28.4	580AA
	245/50R20	24374006	105V	BW	XL	11/32	7.50	7.00 - 8.50	10.0	29.7	2039@51	30.2	580AA
	255/50R20	24502005	109V	BW	XL	11/32	8.00	7.00 - 9.00	10.4	30.1	2271@51	32.6	580AA
	255/55R20	24503203	110V	BW	XL	11/32	8.00	7.00 - 9.00	10.4	31.0	2337@51	34.2	720AA
	265/50R20	24625208	111V	BW	XL	11/32	8.50	7.50 - 9.50	10.9	30.5	2403@51	34.2	580AA

* 80K Mile Limited Warranty on T-speed ratings / 70K Mile Limited Warranty on H and V-speed ratings.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

WEATHERGUARD AW365

· ALL-WEATHER PERFORMANCE · PASSENGER

Looking for the true all-weather tire? Look no further. The WEATHERGUARD AW365 incorporates the latest in tread design technology, fused with an advanced silica-rich compound. Utilizing interlocking circumferential blocks to provide excellent traction and aid with directional stability, while angled tread notches reduce noise and improve overall tread life. Variable depth siping and large notched lateral grooves allow for water evacuation, while 3D siping integrated into the tread blocks improves stability and traction during inclement conditions. All sizes carry the Three-Peak Mountain Snowflake (3PMS*) symbol and are rated for snow conditions, while being backed by a 50K Mile Limited Warranty. The WEATHERGUARD AW365 will survive the harsh winter, the scorching summer, and provide year-round driving confidence.


50K
MILE LIMITED
WARRANTY



500AA
UTQG



PERFORMANCE RATINGS[†]

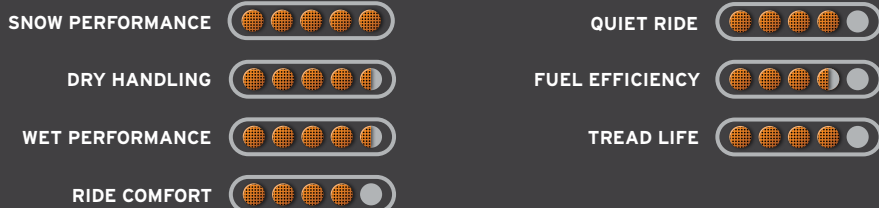

THREE-PEAK MOUNTAIN SNOWFLAKE
3PMS-rated performance in severe snow conditions.



SNOW TRACTION
Elaborate siping and enhanced tread design allows for superior snow traction.



ALL-WEATHER
Pattern design and tread compound enhanced for year-round driving confidence.



S, T, & H RATED
S, T, & H-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
15"	185/60R15	24616016	88H	BW	XL	11/32	5.50	5.00 - 6.50	7.4	23.7	1235@50	18.7	500AA
	185/65R15	24525043	92H	BW	XL	11/32	5.50	5.00 - 6.50	7.4	24.4	1389@50	19.9	500AA
	195/60R15	24635043	92H	BW	XL	11/32	6.00	5.50 - 7.00	7.9	24.2	1389@50	20.2	500AA
	195/65R15	24530052	95H	BW	XL	11/32	6.00	5.50 - 7.00	7.9	25.0	1521@50	20.7	500AA
	P235/75R15	24760017	108S	BW	XL	11/32	6.50	6.00 - 8.00	9.3	28.9	2183@50	30.0	500AA
16"	205/55R16	24460046	94H	BW	XL	11/32	6.50	5.50 - 7.50	8.4	24.9	1477@50	22.0	500AA
	205/60R16	24653028	96H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	25.7	1565@50	23.3	500AA
	205/65R16	24555010	99H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	26.5	1709@50	24.7	500AA
	215/60R16	24655032	99H	BW	XL	11/32	6.50	6.00 - 7.50	8.7	26.1	1709@50	25.0	500AA
	215/65R16	24560025	102T	BW	XL	11/32	6.50	6.00 - 7.50	8.7	27.0	1874@50	26.0	500AA
	215/70R16	24156009	100H	BW	SL	11/32	6.50	5.50 - 7.00	8.7	27.9	1764@44	26.9	500AA
	225/60R16	24665036	98H	BW	SL	11/32	6.50	6.00 - 8.00	9.0	26.6	1653@44	25.9	500AA



3D SIPING

Improves braking and control on icy, wet, and dry roads.



COUPLING TREAD BLOCKS

Provide overall stability and control.



CONSTANT LATERAL GROOVE

Evacuates water and increases wet traction.



ANGLED TREAD NOTCHES

Enhances traction while also reducing noise and improving overall tread life.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
17"	205/50R17	24385103	93H	BW	XL	11/32	6.50	5.50 - 7.50	8.4	25.1	1433@50	22.9	500AA
	215/55R17	24470114	98H	BW	XL	11/32	7.00	6.00 - 7.50	8.9	26.3	1653@50	26.1	500AA
	225/50R17	24395020	98H	BW	XL	11/32	7.00	6.00 - 8.00	9.2	25.9	1653@50	26.6	500AA
	225/55R17	24475020	101H	BW	XL	11/32	7.00	6.00 - 8.00	9.2	26.8	1819@50	27.4	500AA
	225/60R17	24685010	99H	BW	SL	11/32	6.50	6.00 - 8.00	9.0	27.6	1709@44	27.3	500AA
	225/65R17	24557015	106H	BW	XL	11/32	6.50	6.00 - 8.00	9.0	28.5	2094@50	28.4	500AA
	235/55R17	24480014	103H	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.2	1929@50	28.7	500AA
	235/65R17	24657014	108H	BW	XL	11/32	7.00	6.50 - 8.50	9.4	29.1	2205@50	29.8	500AA
	245/65R17	24552516	111H	BW	XL	11/32	7.00	7.00 - 8.50	9.8	29.5	2403@50	31.3	500AA
	225/45R18	24990012	95H	BW	XL	11/32	7.50	7.00 - 8.50	8.9	25.9	1521@50	24.3	500AA
18"	225/55R18	24559005	102H	BW	XL	11/32	7.00	6.00 - 8.00	9.2	27.8	1874@50	28.9	500AA
	235/45R18	24998007	98H	BW	XL	11/32	8.00	7.50 - 9.00	9.3	26.3	1653@50	26.0	500AA
	235/50R18	24410008	101H	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.3	1819@50	29.4	500AA
	235/65R18	24658004	110H	BW	XL	11/32	7.00	6.50 - 8.50	9.4	30.0	2337@50	31.6	500AA
	255/55R18	24995107	109H	BW	XL	11/32	8.00	7.00 - 9.00	10.4	29.0	2271@50	34.2	500AA
	265/60R18	24583307	114H	BW	XL	11/32	8.00	7.50 - 9.50	10.7	30.5	2601@50	35.6	500AA

* This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

MS932 SPORT

· PERFORMANCE TOURING · PASSENGER


The MS932 SPORT, designed to maximize performance, features the latest in optimized tread design for excellent all-season traction and handling while providing a quiet and comfortable ride. Ideal for modern sedans, sport sedans, CUVs, and sport coupes, and utilizes an advanced silica tread compound for great wet weather handling and improved treadwear. Available with T, H, V and W-speed ratings, the MS932 SPORT is sure to cover your high performance needs. All sizes are backed by Milestar's 50K Mile Limited Warranty.

50K
MILE LIMITED
WARRANTY

540AA
540AB
UTQG



PERFORMANCE RATINGS*

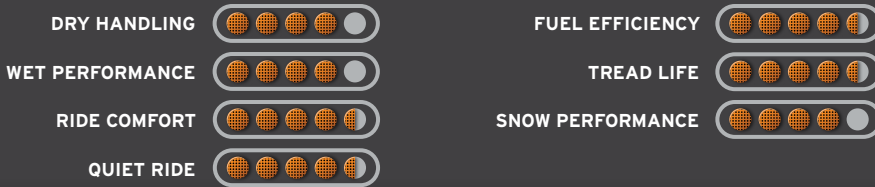

ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



DRY TRACTION
Performance-enhanced tread design for improved handling in dry conditions.



FITMENTS
Designed for a variety of today's vehicles, including touring and CUV applications.



T, H, V & W RATED
T, H, V & W-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG	
14"	175/65R14	24510031	82T	BW	SL	10/32	5.00	5.00 - 6.00	7.0	23.0	1047@44	16.1	540AB	
	185/65R14	24515030	86T	BW	SL	10/32	5.50	5.00 - 6.50	7.4	23.5	1168@44	17.9	540AB	
15"	185/65R15	24525031	88H	BW	SL	10/32	5.50	5.00 - 6.50	7.4	24.4	1235@44	19.2	540AA	
	195/60R15	24635030	88H	BW	SL	10/32	6.00	5.50 - 7.00	7.9	24.2	1235@44	19.4	540AA	
	195/65R15	24530036	91H	BW	SL	10/32	6.00	5.50 - 7.00	7.9	25.0	1356@44	20.3	540AA	
	205/60R15	24640029	91H	BW	SL	10/32	6.00	5.50 - 7.50	8.2	24.7	1356@44	20.8	540AA	
	205/65R15	24540034	94H	BW	SL	10/32	6.00	5.50 - 7.50	8.2	25.5	1477@44	21.8	540AA	
	205/55R16	24460021	91V	BW	SL	10/32	6.50	5.50 - 7.50	8.4	24.9	1356@44	21.2	540AA	
16"	205/60R16	24653015	92H	BW	SL	10/32	6.00	5.50 - 7.50	8.2	25.7	1389@44	21.7	540AA	
	205/65R16	24555008	95H	BW	SL	10/32	6.00	5.50 - 7.50	8.2	25.5	1521@44	24.0	540AA	
	215/55R16	24556017	97H	BW	XL	10/32	7.00	6.00 - 7.50	8.9	25.3	1609@50	23.3	540AA	
	215/60R16	24655020	95H	BW	SL	10/32	6.50	6.00 - 7.50	8.7	26.1	1521@44	24.3	540AA	
	215/65R16	24560014	98T	BW	SL	10/32	6.50	6.00 - 7.50	8.7	27.0	1653@44	25.4	540AA	
	225/60R16	24665024	98H	BW	SL	10/32	6.50	6.00 - 8.00	9.0	26.6	1653@44	25.6	540AA	
	225/65R16	24666006	100H	BW	SL	10/32	6.50	6.00 - 8.00	9.0	27.5	1764@44	26.9	540AA	
	235/60R16	24678019	100H	BW	SL	10/32	7.00	6.50 - 8.50	9.4	27.1	1764@44	27.8	540AA	
	17"	205/40R17	24870014	84V	BW	XL	10/32	7.50	7.00 - 8.00	8.3	23.5	1102@50	19.4	540AA
		205/45R17	24947008	88V	BW	XL	10/32	7.00	6.50 - 7.50	8.1	24.3	1235@50	20.6	540AA
205/50R17		24385006	93V	BW	XL	10/32	6.50	5.50 - 7.50	8.4	25.1	1433@50	21.8	540AA	
215/45R17		24975026	91W	BW	XL	10/32	7.00	7.00 - 8.00	8.4	24.6	1356@50	21.5	540AA	
215/50R17		24390010	95V	BW	XL	10/32	7.00	6.00 - 7.50	8.9	25.5	1521@50	22.9	540AA	
215/55R17		24470009	98V	BW	XL	10/32	7.00	6.00 - 7.50	8.9	26.3	1653@50	25.6	540AA	
215/60R17		24567007	96H	BW	SL	10/32	6.50	6.00 - 7.50	8.7	27.2	1565@44	25.6	540AA	
215/65R17		24556999	99V	BW	SL	10/32	6.50	6.00 - 7.50	8.7	28.0	1709@44	26.3	540AA	
225/45R17		24977040	94W	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.0	1477@50	22.5	540AA	
225/50R17		24395008	98V	BW	XL	10/32	7.00	6.00 - 8.00	9.2	25.9	1653@50	26.3	540AA	
225/55R17		24475009	101V	BW	XL	10/32	7.00	6.00 - 8.00	9.2	26.8	1819@50	27.1	540AA	
225/60R17		24552502	99V	BW	SL	10/32	6.50	6.00 - 8.00	9.0	27.6	1709@44	26.7	540AA	
225/65R17		24557001	102V	BW	SL	10/32	6.50	6.00 - 8.00	9.0	28.5	1874@44	28.0	540AA	
235/45R17		24980027	97W	BW	XL	10/32	8.00	7.00 - 9.00	9.3	25.4	1609@50	23.9	540AA	
235/50R17		24400005	96V	BW	SL	10/32	7.50	6.50 - 8.50	9.6	26.3	1565@44	27.1	540AA	
235/55R17		24480003	99V	BW	SL	10/32	7.50	6.50 - 8.50	9.6	27.2	1709@44	27.7	540AA	
235/60R17		24552503	102V	BW	SL	10/32	7.00	6.50 - 8.50	9.4	28.1	1874@44	28.5	540AA	
235/65R17		24657002	108V	BW	XL	10/32	7.00	6.50 - 8.50	9.4	29.1	2205@50	29.1	540AA	
245/45R17		24982010	99V	BW	XL	10/32	8.00	7.50 - 9.00	9.6	25.7	1709@50	25.3	540AA	
245/65R17		24552501	105V	BW	SL	10/32	7.00	7.00 - 8.50	9.8	29.5	2039@44	30.4	540AA	
18"	215/55R18	-	-	BW	-	-	-	-	-	-	-	-	-	
	225/40R18	24977031	92W	BW	XL	10/32	8.00	7.50 - 9.00	9.1	25.1	1389@50	22.8	540AA	
	225/45R18	24990015	95W	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.9	1521@50	24.1	540AA	
	225/50R18	24588003	95V	BW	SL	10/32	7.00	6.00 - 8.00	9.2	26.9	1521@44	27.1	540AA	
	225/55R18	24559003	98V	BW	SL	10/32	7.00	6.00 - 8.00	9.2	27.8	1653@44	27.1	540AA	
	225/60R18	24496801	100V	BW	SL	10/32	6.50	6.00 - 8.00	9.0	28.6	1764@44	28.9	540AA	



WIDE CIRCUMFERENTIAL RIBS

Wide circumferential ribs improve stability, handling, and lateral grip.



OPTIMIZED TREAD PATTERN

Provides consistent grip all year round.



WIDE CIRCUMFERENTIAL GROOVES

Wide circumferential grooves aid in the evacuation of water to reduce hydroplaning.



LATERAL SIPING

Consistent traction in inclement weather.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG	
18"	235/40R18	24080028	95W	BW	XL	10/32	8.50	8.00 - 9.50	9.5	25.4	1521@50	24.3	540AA	
	235/45R18	24998004	94V	BW	SL	10/32	8.00	7.50 - 9.00	9.3	26.3	1477@44	25.3	540AA	
	235/50R18	24410010	101W	BW	XL	10/32	7.50	6.50 - 8.50	9.6	27.3	1819@50	28.0	540AA	
	235/55R18	24496701	100V	BW	SL	10/32	7.50	6.50 - 8.50	9.6	28.1	1764@44	30.3	540AA	
	235/60R18	24583201	107V	BW	XL	10/32	7.00	6.50 - 8.50	9.4	29.1	2150@50	29.6	540AA	
	235/65R18	24658001	106H	BW	SL	10/32	7.00	6.50 - 8.50	9.4	29.1	2094@44	30.0	540AA	
	245/40R18	-	97W	BW	-	-	-	-	-	-	-	-	-	-
	245/45R18	24995019	100W	BW	XL	10/32	8.00	7.50 - 9.00	9.6	26.7	1764@50	27.8	540AA	
	245/50R18	-	-	BW	-	-	-	-	-	-	-	-	-	-
	245/55R18	24375000	103V	BW	SL	10/32	7.50	7.00 - 8.50	10.0	28.6	1929@44	32.1	540AA	
	245/60R18	24376001	105H	BW	SL	10/32	7.00	7.00 - 8.50	9.8	29.6	2039@44	30.3	540AA	
	255/55R18	24995010	109V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	29.0	2271@50	32.4	540AA	
	255/60R18	-	-	-	-	-	-	-	-	-	-	-	-	-
	255/65R18	24627001	111T	BW	SL	10/32	7.50	7.00 - 9.00	10.2	31.1	2403@44	35.2	540AA	
	265/60R18	24583301	110V	BW	SL	10/32	8.00	7.50 - 9.50	10.7	30.5	2337@44	34.5	540AA	
	225/55R19	24988003	99V	BW	SL	10/32	7.00	6.00 - 8.00	9.2	28.8	1709@44	29.6	540AA	
235/40R19	-	-	-	-	-	-	-	-	-	-	-	-	-	
235/45R19	-	-	-	-	-	-	-	-	-	-	-	-	-	
235/50R19	24880500	99V	BW	SL	10/32	7.50	6.50 - 8.50	9.6	28.3	1709@44	29.7	540AA		
235/55R19	24497002	105V	BW	XL	10/32	7.50	6.50 - 8.50	9.6	29.2	2039@50	31.4	540AA		
245/40R19	24083108	98W	BW	XL	10/32	8.50	8.00 - 9.50	9.8	26.7	1653@50	27.3	540AA		
245/45R19	-	102W	BW	-	-	-	-	-	-	-	-	-	-	
245/55R19	24377001	103V	BW	SL	10/32	7.50	7.00 - 8.50	10.0	29.6	1929@44	35.0	540AA		
255/40R19	-	-	-	-	-	-	-	-	-	-	-	-	-	
255/45R19	24985500	100V	BW	SL	10/32	8.50	8.00 - 9.50	10.0	28.1	1764@44	31.0	540AA		
255/50R19	24083011	107V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	29.1	2150@50	33.0	540AA		
255/55R19	24502104	107V	BW	SL	10/32	8.00	7.00 - 9.00	10.4	30.0	2149@44	34.7	540AA		
255/60R19	24628001	109H	BW	SL	10/32	7.50	7.00 - 9.00	10.2	31.1	2271@44	34.1	540AA		
235/55R20	24498001	105V	BW	XL	10/32	7.50	6.50 - 8.50	9.6	30.2	2039@50	32.6	540AA		
245/40R20	-	-	-	-	-	-	-	-	-	-	-	-	-	
245/45R20	-	103W	BW	-	-	-	-	-	-	-	-	-	-	
245/50R20	24374003	102V	BW	SL	10/32	7.50	7.00 - 8.50	10.0	29.7	1874@44	33.2	540AA		
255/35R20	-	-	-	-	-	-	-	-	-	-	-	-	-	
255/45R20	-	-	-	-	-	-	-	-	-	-	-	-	-	
255/50R20	24502002	109V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	30.1	2271@50	36.2	540AA		
255/55R20	24503201	110V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	31.0	2337@50	36.8	540AA		
265/50R20	24652005	107V	BW	SL	10/32	8.50	7.50 - 9.50	10.9	30.5	2149@44	36.8	540AA		

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

• Coming Soon

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

STREETSTEEL

· CLASSIC PERFORMANCE · PASSENGER

The STREETSTEEL answers the muscle car enthusiast looking for a tire with modern engineering and classic styling cues of years past. The STREETSTEEL includes a checkered flag inspired sidewall design with solid white lettering, recalling the heydays when hot rodding and Detroit muscle ruled the highways and byways of America. The contemporary all-season tread design delivers improved cornering and steering stability, while the angled siping pattern and four circumferential grooves provide a wide contact patch for superior grip and wet performance. The STREETSTEEL provides retro performance ready for daily commutes or the weekend show-n-go.

40K
MILE LIMITED
WARRANTY

440AB
UTQG

PERFORMANCE RATINGS*

DRY HANDLING 

QUIET RIDE 

WET PERFORMANCE 

FUEL EFFICIENCY 

RIDE COMFORT 

TREAD LIFE 



FITMENTS

Designed for a variety of today's vehicles, including muscle car and classic truck applications.



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



DURABILITY

Steel-belted construction for durability and performance.



S & T RATED

S & T-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
14"	P225/70R14	24247001	98T	RWL	SL	10/32	6.50	6.00 - 7.50	9.1	26.5	1675@44	25.5	440AB
	P215/60R15	24645025	93T	RWL	SL	10/32	6.50	6.00 - 7.50	8.7	25.2	1411@44	23.6	440AB
	P215/65R15	24545027	95T	RWL	SL	10/32	6.50	6.00 - 7.50	8.7	26.0	1510@44	24.9	440AB
15"	P215/70R15	24245020	97T	RWL	SL	10/32	6.50	5.50 - 7.00	8.8	26.9	1620@44	25.8	440AB
	P225/70R15	24627502	100T	RWL	SL	10/32	6.50	6.00 - 7.50	9.1	27.4	1753@44	26.8	440AB
	P235/60R15	24482001	98T	RWL	SL	10/32	7.00	6.50 - 8.50	9.4	26.1	1642@44	26.7	440AB



RAISED WHITE LETTERING
Add additional style to the classic sidewall.



ANGLED SHOULDER DESIGN
Improves cornering capabilities and steering stability.



ANGLED SIPING AND NOTCHED CENTER RIB
Increases stability and provides excellent grip in all conditions.



CIRCUMFERENTIAL GROOVES
Optimize water evacuation for enhanced wet traction.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
15"	P235/70R15	24252003	102T	RWL	SL	10/32	7.00	6.00 - 8.00	9.4	28.0	1896@44	28.7	440AB
	P245/60R15	24377501	100T	RWL	SL	10/32	7.00	7.00 - 8.50	9.6	26.6	1753@44	28.0	440AB
	P255/70R15	24627501	108T	RWL	SL	10/32	7.50	6.50 - 8.50	10.2	29.1	2183@44	32.0	440AB
	P275/60R15	24370105	107T	RWL	SL	10/32	8.00	7.50 - 9.50	10.9	28.0	2149@44	32.8	440AB
	P295/50R15	24485001	105S	RWL	SL	10/32	9.50	8.00 - 10.50	12.2	26.7	2061@44	34.2	440AB

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

MS775 TOURING SLE

· ALL-SEASON TOURING · PASSENGER

The MS775 TOURING SLE is a modern tire designed for a variety of vehicles. With white wall and black side wall options, this versatile tire looks great for taking the scenic path or cruising around town. Circumferential interlocking tread blocks provide stability and traction while the open shoulder grooves aid in expelling water for a smooth and pleasant ride.

40K
MILE LIMITED
WARRANTY

480AB
UTQG

PERFORMANCE RATINGS*



WET TRACTION

Elaborate siping and enhanced tread design allows for superior water dispersion.



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



DURABILITY

Steel-belted construction for durability and performance.



S RATED

S-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
13"	P155/80R13	24160016	79S	WW	SL	9/32	4.50	4.00 - 5.00	6.2	22.8	959@44	14.1	480AB
	P175/80R13	24700003	86S	WW	SL	10/32	5.00	4.50 - 6.00	7.0	24.0	1179@44	14.4	480AB
14"	P185/75R14	24715005	89S	WW	SL	10/32	5.00	4.50 - 6.00	7.2	25.0	1290@44	18.1	480AB
	P195/75R14	24720005	92S	WW	SL	10/32	5.50	5.00 - 6.50	7.7	25.5	1400@44	19.3	480AB
	P205/75R14	24725005	95S	WW	SL	10/32	5.50	5.00 - 7.00	8.0	26.1	1532@44	20.6	480AB
	P215/70R14	24244002	96S	WW	SL	10/32	6.50	5.50 - 7.00	8.7	25.9	1548@44	22.6	480AB



INTERLOCKING CIRCUMFERENTIAL BLOCKS

Interlocking circumferential blocks provide excellent traction and aid directional stability.



OPEN SHOULDER TREAD BLOCKS

Open shoulder tread blocks aid in water evacuation for superior wet weather traction.



CIRCUMFERENTIAL GROOVES

Circumferential grooves optimize water evacuation for enhanced wet traction.



VARIABLE SIPING

Provides consistent traction in inclement weather.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
15"	P205/70R15	24240015	95S	WW	SL	10/32	6.00	5.00 - 7.00	8.2	26.3	1499@44	21.6	480AB
	P205/75R15	24740013	97S	WW	SL	10/32	5.50	5.00 - 7.00	8.0	27.1	1598@44	22.4	480AB
	P215/70R15	24245013	97S	WW	SL	10/32	5.50	5.50 - 7.00	8.7	26.9	1620@44	23.7	480AB
	P215/75R15	24745008	100S	WW	SL	10/32	6.00	5.50 - 7.00	8.5	27.7	1742@44	23.6	480AB
	P225/75R15	24750005	102S	WW	SL	10/32	6.00	6.00 - 7.50	8.8	28.3	1874@44	24.9	480AB
	P235/75R15	24760010	105S	WW	SL	10/32	6.50	6.00 - 8.00	9.3	28.9	2028@44	27.4	480AB

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

MS70 ALL-SEASON

· ALL-SEASON TOURING · PASSENGER

The MS70 ALL-SEASON's tread design aids in efficient water evacuation, directional stability, and enhanced traction year round. Intricate siping patterns provide more biting edges while allowing for increased heat ventilation for both superior grip and increased tread life. The MS70 delivers all the quality, performance, and value you would expect from a Milestar product.

40K
MILE LIMITED
WARRANTY

300AB
UTQG

PERFORMANCE RATINGS*

DRY HANDLING 

QUIET RIDE 

WET PERFORMANCE 

FUEL EFFICIENCY 

RIDE COMFORT 

TREAD LIFE 



WET TRACTION

Elaborate siping and enhanced tread design allows for superior water dispersion.



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



DRY TRACTION

Performance-enhanced tread design for improved handling in dry conditions.



T RATED

T-speed rated performance.



SYMMETRICAL TREAD DESIGN

Symmetrical tread design enables multiple tire rotation options for increased tread life.



VERTICAL SIPING PATTERNS

Vertical siping patterns assist in lateral traction while increasing stability.



CIRCUMFERENTIAL GROOVES

Circumferential grooves optimize water evacuation for enhanced wet traction.



VARIABLE SIPING

Provides consistent traction in inclement weather.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
13"	175/70R13	24216016	82T	BW	SL	10/32	5.00	4.50 - 6.00	7.0	22.7	1036@44	15.7	300AB
	185/70R14	24235015	87T	BW	SL	10/32	5.50	4.50 - 6.00	7.4	24.3	1201@44	19.1	300AB
14"	195/70R14	24275014	90T	BW	SL	10/32	6.00	5.00 - 6.50	7.9	24.8	1312@44	20.8	300AB
	205/70R14	24228012	93T	BW	SL	10/32	6.00	5.00 - 7.00	8.2	25.4	1433@44	21.9	300AB

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

LIGHT TRUCK / SUV TIRE PRODUCT LINE-UP



PATAGONIA M/T-02

ENHANCED MAXIMUM TRACTION

PATAGONIA X/T

XTREME ALL-TERRAIN



PATAGONIA A/T PRO

ENHANCED ALL-TERRAIN

PATAGONIA A/T R

RUGGED ALL-TERRAIN

PATAGONIA H/T

ALL-SEASON HIGHWAY

SHOWN: 2020 JEEP® JT GLADIATOR - PATAGONIA X/T 40X13.50R17LT

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

PATAGONIA M/T-02

· MAXIMUM TRACTION · LT / SUV

The all-new PATAGONIA M/T-02 has been developed around years of feedback from real-world enthusiasts and professional rock crawling competitions, and garners much of the original M/T design, yet integrates all-new internal tire construction and rubber formulates to raise the level of performance. The M/T-02 now integrates cross-directional siping to improve tread block strength and resilience with a more stable footprint while reducing the risk of chunking. Redeveloped from the inside out, the much improved mud terrain integrates Milestar's MILETECH® 3-Ply Sidewall with added rigidity for maximum sidewall durability, yet still pliable and flexible for aired-down bite and rock-crawling grip. A newly formulated silica-enriched tread compound that includes cut and chip resistance, allows for longer tread life without sacrificing off-road traction.

PERFORMANCE RATINGS[†]



MILETECH® ADVANCED COMPOUND TECHNOLOGY

Provides added strength, impact protection, and enhanced sidewall engineered for the toughest terrains.



WET TRACTION

Elaborate siping and enhanced tread design allows for superior water dispersion.



EXTREME TERRAIN

Aggressive design and large voids to effectively navigate rough conditions.



Q RATED

Q-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
15"	31X10.50R15LT	22285032	109Q	ROBL	C/6	19/32	8.50	7.00 - 9.00	10.6	30.7	2270@50	-	50.1
	33X12.50R15LT	22228006	108Q	ROBL	C/6	19/32	10.00	8.00 - 10.50	12.5	32.8	2205@35	-	61.7
	35X12.50R15LT	22228502	113Q	ROBL	C/6	19/32	10.00	8.50 - 11.00	12.5	34.8	2535@35	-	67.1
16"	LT265/75R16 (*32X10.50R16LT)	22279052	123/120Q	ROBL	E/10	19/32	7.50	7.00 - 9.00	10.5	31.9	3415@80	3085@80	60.0
	LT285/75R16 (*33X11.50R16LT)	22789024	126/123Q	ROBL	E/10	19/32	8.00	7.50 - 9.50	11.3	33.1	3750@80	3415@80	64.7
	LT305/70R16 (*33X12.50R16LT)	22800007	124/121Q	ROBL	E/10	19/32	9.00	8.00 - 10.00	12.2	33.1	3525@65	3195@65	67.8
	LT315/75R16 (*35X12.50R16LT)	22790007	121/118Q	ROBL	D/8	19/32	9.50	8.00 - 11.00	12.3	34.8	3195@50	2910@50	69.9
	33X12.50R17LT	22229008	114Q	ROBL	D/8	19/32	10.00	8.50 - 11.00	12.5	32.8	2600@50	-	65.1
17"	37X12.50R17LT	22050504	124Q	ROBL	D/8	19/32	10.00	8.00 - 11.00	12.5	36.8	3525@50	-	73.8
	38X13.50R17LT	22230005	127Q	ROBL	D/8	19/32	11.00	8.50 - 11.00	13.6	37.8	3860@50	-	81.8
	40X13.50R17LT	22235006	121Q	ROBL	D/8	19/32	11.00	8.50 - 11.00	13.6	39.8	3195@50	-	88.7
	LT265/70R17 (*32X10.50R17LT)	22810024	121/118Q	ROBL	E/10	19/32	8.00	7.00 - 9.00	10.7	31.9	3195@80	2910@80	61.3
	LT285/70R17 (*33X11.50R17LT)	22688017	121/118Q	ROBL	E/10	19/32	8.50	7.50 - 9.00	11.5	33.0	3195@80	2910@80	62.2
	LT295/70R17 (*34X12.00R17LT)	22936003	121/118Q	ROBL	E/10	19/32	8.50	7.50 - 10.00	11.8	33.5	3195@80	2910@80	67.1
	LT315/70R17 (*35X12.50R17LT)	22801006	121/118Q	ROBL	D/8	19/32	9.50	8.00 - 11.00	12.7	34.6	3195@50	2910@50	70.6
18"	33X12.50R18LT	22789502	122Q	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	32.8	3305@80	-	66.9
	35X12.50R18LT	22229257	128Q	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3970@80	-	73.7
	LT275/65R18 (*32X11.00R18LT)	22772511	123/120Q	ROBL	E/10	19/32	8.00	8.00 - 9.50	11.0	32.3	3415@80	3085@80	61.6
	LT275/70R18 (*33X11.00R18LT)	22797014	125/122Q	ROBL	E/10	19/32	8.00	7.00 - 9.00	11.0	33.4	3640@80	3305@80	65.4
	LT285/65R18 (*33X11.50R18LT)	-	-	-	-	-	-	-	-	-	-	-	-



3-PLY SIDEWALL
3-ply sidewall provides added strength and impact protection.



HIGH VOID TREAD DESIGN
High void tread promotes self-cleaning capabilities to quickly expel mud and debris.



ANGLED BITING EDGES AND COMPLEX SIPING
Enhances traction and performance on both on and off-road environments.



STONE EJECTORS
Integrated to protect against stone retention and drilling.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
20"	35X12.50R20LT	22229507	125Q	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3640@80	-	75.2
	37X12.50R20LT	22050603	128Q	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	36.8	3970@80	-	78.5
	37X13.50R20LT	22050651	127Q	ROBL	E/10	19/32	11.00	9.50 - 12.00	13.6	36.8	3860@65	-	79.5
	38X15.50R20LT	-	-	-	-	-	-	-	-	-	-	-	-
	42X14.50R20LT	22804000	125Q	ROBL	C/6	19/32	11.50	9.50 - 12.50	14.4	41.7	3640@35	-	98.2
	LT275/65R20 (*34X11.00R20LT)	22689316	126/123Q	ROBL	E/10	19/32	8.00	8.00 - 9.50	11.0	34.3	3750@80	3415@80	66.2
	LT285/55R20 (*33X11.50R20LT)	22401510	122/119Q	ROBL	E/10	19/32	9.00	8.50 - 10.00	11.7	32.6	3305@80	3000@80	65.2
22"	LT295/60R20 (*35X11.50R20)	-	-	-	-	-	-	-	-	-	-	-	-
	LT305/55R20 (*33X12.50R20LT)	22789707	125/122Q	ROBL	F/12	19/32	9.50	9.00 - 11.00	12.4	33.5	3640@80	3305@80	70.4
	33X12.50R22LT	22247203	114Q	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	32.8	2600@80	-	68.0
	35X12.50R22LT	22229704	121Q	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3195@80	-	73.9
	37X13.50R22LT	22371304	128Q	ROBL	F/12	19/32	11.00	9.50 - 12.00	13.6	36.8	3970@80	-	85.3

BLACK LABEL

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
17"	37X12.50R17LT NHS	22050505	124Q	ROBL	D/8	19/32	10.00	8.50 - 11.00	12.5	36.8	3525@50	-	75.7
	38X13.50R17LT NHS	22230007	127Q	ROBL	D/8	19/32	11.00	8.50 - 11.00	13.6	37.8	3860@50	-	81.8
	40X13.50R17LT NHS	-	121Q	ROBL	-	19/32	11.00	8.50 - 11.00	13.6	39.8	3195@50	-	88.8
	42X14.50R17LT NHS	-	-	-	-	-	-	-	-	-	-	-	-

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Similar flotation sizes

|| Non-highway service

* Coming Soon

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

PATAGONIA X/T

· XTREME ALL-TERRAIN · LT / SUV

The PATAGONIA X/T is designed to tackle your on and off-road adventures. A cut-and-chip resistant compound with a rugged MILETECH® 3-Ply Sidewall is utilized for enhanced durability in rough conditions, with alternating open shoulders providing additional biting edges for superior traction on all terrains. All sizes carry the Three-Peak Mountain Snowflake (3PMS*) symbol and are rated for snow conditions. Alternating step-down grooves integrated into the shoulder blocks provide tread rigidity for enhanced stability on and off the road, while the tread pattern optimizes the pitch sequence for a quieter ride. With a feature-packed design and a 40K Mile Limited Warranty, the PATAGONIA X/T will meet your on and off-road needs.

40K
MILE LIMITED
WARRANTY




500AB
UTQG†

PERFORMANCE RATINGS‡



THREE-PEAK MOUNTAIN SNOWFLAKE
3PMS*-rated performance in severe snow conditions.



CUT-AND-CHIP COMPOUND
Compound formulated to withstand abuse from rocks and gravel in rough conditions.



EXTREME DURABILITY
Radial construction and 3-ply sidewall.



Q, R, S, & T RATED
Q, R, S, & T-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	31X10.50R15LT	22285035	109Q	BW	C/6	17/32	8.50	7.00 - 9.00	10.6	30.7	2270@50	-	49.5	-
	16"	LT265/75R16 (#32X10.50R16LT)	22279048	123/120Q	BW	E/10	17/32	7.50	5.50 - 7.00	10.5	31.9	3415@80	3085@80	59.5
17"	LT285/75R16 (#33X11.50R16LT)	22789023	126/123Q	BW	E/10	17/32	8.00	7.50 - 9.00	11.3	33.1	3750@80	3415@80	65.1	-
	35X12.50R17LT	22229005	121Q	BW	E/10	19/32	10.00	8.50 - 11.00	12.5	34.8	3195@65	-	73.6	-
	37X12.50R17LT	22050503	124Q	BW	D/8	19/32	10.00	8.50 - 11.00	12.5	36.8	3525@50	-	76.1	-
	38X13.50R17LT	22230006	127Q	BW	D/8	19/32	11.00	9.00 - 11.50	13.6	37.8	3860@50	-	83.7	-
	40X13.50R17LT	22235003	121Q	BW	D/8	19/32	11.00	8.50 - 11.00	13.6	39.8	3195@50	-	89.1	-
	LT245/75R17 (#31X9.50R17)	22275514	121/118Q	BW	E/10	17/32	7.00	6.50 - 8.00	9.8	31.7	3195@80	2910@80	55.3	-
	LT255/80R17 (#33X10.00R17)	22275801	121/118S	BW	E/10	17/32	7.00	6.50 - 8.50	10.0	33.3	3195@80	2910@80	-	-
	LT265/70R17 (#32X10.50R17LT)	22810019	121/118Q	BW	E/10	17/32	8.00	7.00 - 8.50	10.7	31.9	3195@80	2910@80	58.4	-
	265/70R17	24689219	115T	BW	SL	17/32	8.00	7.00 - 9.00	10.7	31.7	2679@44	-	50.1	500AB
	LT275/80R17 (#34X10.50R17)	22275901	121/118Q	BW	E/10	17/32	7.50	7.00 - 9.00	11.8	34.6	3195@80	2910@80	67.2	-
18"	LT285/70R17 (#33X11.50R17LT)	22688016	121/118Q	BW	E/10	17/32	8.50	7.50 - 9.00	11.5	33.0	3195@80	2910@80	62.6	-
	LT285/75R17 (#34X11.00R17)	22751802	121/118S	BW	E/10	17/32	8.00	7.50 - 9.50	11.3	34.1	3195@80	2910@80	66.8	-
	LT295/70R17 (#34X12.00R17)	22936005	121/118Q	BW	E/10	17/32	8.50	7.50 - 10.00	11.8	33.5	3195@80	2910@80	67.0	-
	33X12.50R18LT	22789504	122Q	BW	F/12	17/32	10.00	8.50 - 11.00	12.5	32.8	3305@80	-	-	-
	35X12.50R18LT	22292254	128Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3970@80	-	65.0	-
	LT265/70R18 (#33X10.50R18)	22815008	124/121Q	BW	E/10	17/32	8.00	7.00 - 9.00	10.7	32.9	3525@80	3195@80	61.4	-
	LT275/65R18 (#32X11.00R18LT)	22772508	123/120S	BW	E/10	17/32	8.00	7.50 - 9.00	11.0	32.3	3415@80	3085@80	59.5	-
	275/65R18	24531011	116T	BW	SL	17/32	8.00	7.50 - 9.50	11.0	32.1	2756@50	-	52.1	500AB
LT275/70R18 (#33X11.00R18LT)	22797011	125/122Q	BW	E/10	19/32	8.00	7.00 - 8.50	11.0	33.4	3640@80	3305@80	67.6	-	
LT285/65R18 (#33X11.50R18LT)	22799002	125/122S	BW	E/10	17/32	8.50	8.00 - 10.00	11.5	32.8	3640@80	3305@80	61.9	-	
LT285/75R18 (#35X11.00R18)	22751800	129/126Q	BW	E/10	17/32	8.00	7.50 - 9.50	11.3	35.1	4080@80	3750@80	70.6	-	
LT295/70R18 (#34X12.00R18)	22799901	129/126R	BW	E/10	18/32	8.50	7.50 - 10.00	11.8	34.5	4080@80	3750@80	-	-	



MILETECH® 3-PLY SIDEWALL

3-ply sidewall provides added strength and impact protection.



VARIABLE PITCH TREAD DESIGN

Optimized pitch sequence provides a quieter ride.



RUGGED TREAD BLOCKS

Step-down supports on the center blocks enhance off-road traction.



STONE EJECTORS

Integrated to protect against stone retention and drilling.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
20"	33X12.50R20LT	22229102	119Q	BW	F/12	17/32	10.00	8.50 - 11.00	12.5	32.8	3000@80	-	69.7	-
	35X12.50R20LT	22229510	125Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3640@80	-	76.7	-
	37X12.50R20LT	22050602	128Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	36.8	3970@80	-	81.3	-
	37X13.50R20LT	22050652	127Q	BW	E/10	19/32	11.00	9.50 - 12.00	13.6	36.8	3860@65	-	81.6	-
	38X15.50R20LT	-	128Q	BW	E/10	-	-	-	-	-	-	-	-	-
	40X15.50R20LT	-	128Q	BW	D/8	-	-	-	-	-	-	-	-	-
	LT265/60R20 (*33X10.50R20)	22152112	121/118Q	BW	E/10	17/32	7.99	8.00 - 9.50	10.7	32.8	3195@80	2910@80	62.1	-
	275/55R20	24660008	117T	BW	XL	17/32	8.50	7.50 - 9.50	11.2	31.9	2833@50	-	53.4	500AB
	LT275/60R20 (*33X11.00R20)	22466008	123/120Q	BW	E/10	17/32	7.99	8.00 - 9.50	11.0	33.2	3415@80	3085@80	63.7	-
	275/60R20	24466009	116T	BW	XL	17/32	8.00	7.50 - 9.50	11.0	33.0	2756@50	-	56.2	500AB
	LT275/65R20 (*34X11.00R20LT)	22689315	126/123Q	BW	E/10	15/32	8.00	7.50 - 9.50	11.0	34.3	3750@80	3415@80	66.3	-
	LT285/55R20 (*33X11.50R20LT)	22401509	122/119Q	BW	E/10	15/32	9.00	8.00 - 10.00	11.7	32.6	3305@80	3000@80	65.1	-
	LT295/55R20 (*33X11.50R20)	22235401	123/120Q	BW	E/10	17/32	9.50	8.50 - 10.50	12.2	33.0	3415@80	3085@80	65.9	-
	LT295/60R20 (*34X12.00R20)	22935005	126/123R	BW	E/10	17/32	8.50	8.50 - 10.50	11.8	34.2	3750@80	3415@80	68.9	-
LT295/65R20 (*35X11.50R20)	22438001	129/126Q	BW	E/10	17/32	8.50	8.50 - 10.50	11.8	35.4	4080@80	3750@80	72.0	-	
LT305/55R20 (*33X12.50R20LT)	22789710	125/122Q	BW	F/12	18/32	9.50	8.50 - 11.00	12.4	33.5	3640@80	3305@80	69.5	-	
22"	35X12.50R22LT	22229703	121Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3195@80	-	75.6	-
	37X13.50R22LT	22371303	128Q	BW	F/12	19/32	11.00	8.50 - 11.00	13.6	36.8	3970@80	-	86.0	-
	40X15.50R22LT	-	128Q	BW	E/10	-	-	-	-	-	-	-	-	

* This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

† UTQG for non-LT sizing only.

‡ Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

§ Similar flotation sizes

• Coming Soon

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

PATAGONIA A/T PRO

• ALL-TERRAIN • LT / SUV

The all-new PATAGONIA A/T PRO is an aggressive all-terrain tire specifically designed to conquer any terrain during any condition for any adventure. It is Three Peak Mountain Snowflake (3PMS*) rated for severe snow making it ideal for inclement weather and heavy winter conditions. It is engineered to maximize off-road grip and widen the contact patch while improving off-road traction and comfort. The rugged and rigid tread blocks are designed to grip the terrain providing sure-footed traction while angled tread notches optimize the pitch sequence for a quieter ride. Staggered step-down grooves provides tread rigidity, enhancing stability and handling while protecting the groove from stone drilling. The A/T PRO integrates Milestar's MILETECH® advanced sidewall compound technology for enhanced strength and impact protection. The Aggressive Upper Sidewall helps protect the tire from sharp rocks and provides additional side-biting and off-road traction. The A/T PRO is a great balance of an aggressive all-weather, all-terrain tire with the ultimate off-road trail performance.


55K
MILE LIMITED
WARRANTY



660AA
UTQG†



PERFORMANCE RATINGS#

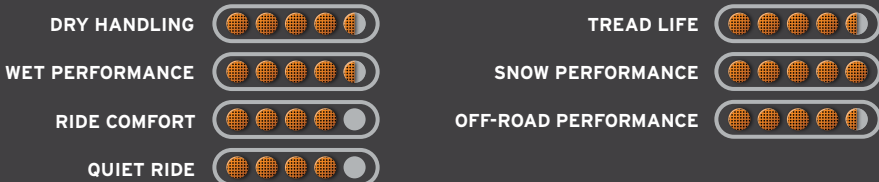

MILETECH® ADVANCED COMPOUND TECHNOLOGY
Provides added strength, impact protection, and enhanced sidewall engineered for the toughest terrains.



THREE-PEAK MOUNTAIN SNOWFLAKE
3PMS*-rated performance in severe snow conditions.



EXTREME TERRAIN
Aggressive design and large voids to effectively navigate rough conditions.



H, R, S, & T RATED
H, R, S, & T-speed rated performance.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	30X9.50R15LT	22280012	104S	BW	C/6	18/32	7.50	6.00 - 8.00	9.4	29.5	1984@50	-	43.0	-
	31X10.50R15LT	22285036	109S	BW	C/6	18/32	8.50	7.00 - 9.00	10.6	30.5	2271@50	-	43.0	-
	215/75R15	24745011	100T	BW	SL	14/32	6.50	5.50 - 7.00	8.5	27.7	1764@47	-	30.9	660AA
	235/75R15	24760021	109T	BW	XL	14/32	6.00	6.00 - 8.00	9.3	28.9	2271@51	-	34.2	660AA
16"	LT225/75R16	22756008	115/112S	BW	E/10	18/32	6.00	6.00 - 7.50	8.8	29.3	2679@80	2470@80	40.8	-
	LT235/85R16	22270056	120/116S	BW	E/10	18/32	6.50	6.00 - 7.50	9.3	31.7	3086@80	2778@80	43.0	-
	LT245/75R16	22275057	120/116S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	30.5	3086@80	2778@80	43.0	-
	245/75R16	24768011	115T	BW	XL	14/32	7.00	6.50 - 8.00	9.8	30.5	2679@51	-	38.6	660AA
	265/70R16	24272018	112T	BW	SL	14/32	8.00	7.00 - 9.00	10.7	30.6	2469@47	-	40.8	660AA
	LT265/75R16	22279054	123/120S	BW	E/10	18/32	7.50	7.00 - 9.50	10.5	31.7	3417@80	3085@80	48.5	-
	265/75R16	24773012	116T	BW	SL	14/32	7.50	7.00 - 9.00	10.5	31.7	2756@47	-	44.1	660AA
	LT285/75R16	22789027	126/123R	BW	E/10	18/32	8.00	7.50 - 9.50	11.3	32.8	3748@80	3415@80	51.8	-
17"	LT305/70R16	22800008	124/121R	BW	E/10	18/32	9.00	8.00 - 10.00	12.2	32.8	3527@65	3195@65	46.3	-
	LT315/75R16	22790010	127/124R	BW	E/10	18/32	8.50	8.00 - 10.50	12.3	34.6	3858@65	3525@65	46.3	-
	35X12.50R17LT	22229009	121R	BW	E/10	18/32	10.00	8.50 - 11.00	12.5	34.5	3197@65	-	60.6	-
	235/75R17	22021001	109T	BW	SL	14/32	6.50	6.00 - 8.00	9.3	30.9	2271@47	-	37.5	660AA
	LT235/80R17	22275613	120/117R	BW	E/10	18/32	6.50	6.00 - 8.00	9.3	31.8	3086@80	2835@80	44.1	-
	245/65R17	24552521	111T	BW	XL	14/32	7.00	7.00 - 8.50	9.8	29.5	2403@51	-	37.5	600AA
	LT245/70R17	22269017	119/116S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	30.6	2998@80	2755@80	44.1	-
	245/70R17	24552614	114T	BW	XL	14/32	7.00	6.50 - 8.00	9.8	30.6	2601@51	-	38.6	660AA
	LT245/75R17	22275516	121/118S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	31.5	3197@80	2910@80	45.2	-
	255/65R17	24626006	114T	BW	XL	14/32	8.00	7.00 - 9.00	10.2	30.1	2601@51	-	39.7	660AA
	255/70R17	24629011	112T	BW	SL	14/32	7.50	6.50 - 8.50	10.2	31.1	2469@47	-	39.7	660AA
	265/65R17	24689017	116T	BW	XL	14/32	8.00	7.50 - 9.50	10.7	30.6	2756@51	-	41.9	600AA
	LT265/70R17	22810026	121/118S	BW	E/10	18/32	8.00	7.00 - 9.00	10.7	31.7	3197@80	2910@80	49.6	-
	265/70R17	24689220	115T	BW	SL	14/32	8.00	7.00 - 9.00	10.7	31.7	2679@47	-	43.0	660AA
	LT275/70R17	22139002	121/118S	BW	E/10	18/32	8.00	7.00 - 9.00	11.0	32.2	3197@80	2910@80	49.6	-
	LT285/70R17	22688020	121/118S	BW	E/10	18/32	8.50	7.00 - 9.50	11.5	32.8	3197@80	2910@80	51.8	-
285/70R17	24695004	116T	BW	SL	14/32	8.50	7.50 - 9.50	11.5	32.8	2756@47	-	45.2	660AA	
LT285/75R17	22751803	121/118S	BW	E/10	18/32	8.00	7.50 - 9.50	11.3	33.9	3197@80	2910@80	47.4	-	
LT315/70R17	22801007	121/118S	BW	E/10	18/32	9.50	8.00 - 10.50	12.7	34.4	3197@65	2910@65	59.5	-	



AGGRESSIVE UPPER SIDEWALL

Helps protect the tire from sharp rocks and provide additional off-road traction.



STAGGERED STEP-DOWN GROOVE

Protects the grooves from stone drilling.



RUGGED AND RIGID TREAD BLOCKS

Provides rigidity which enhances vehicle stability and handling.



ANGLED TREAD NOTCHES

Optimized pitch sequence provides a quieter ride.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
18"	35X12.50R18LT	22229258	128R	BW	F/12	18/32	10.00	8.50 - 11.00	12.5	34.5	3968@80	-	61.7	-
	255/55R18	24995108	109H	BW	XL	14/32	8.00	7.00 - 9.00	10.4	29.0	2271@51	-	37.5	660AA
	255/70R18	24499003	113T	BW	SL	14/32	7.50	6.50 - 8.50	10.2	32.1	2535@47	-	41.9	660AA
	265/60R18	24583310	114T	BW	XL	14/32	8.00	7.50 - 9.50	10.7	30.5	2601@51	-	41.9	660AA
	265/65R18	24651007	114T	BW	SL	14/32	8.00	7.50 - 9.50	10.7	31.5	2601@47	-	40.8	660AA
	LT265/70R18	22815009	124/121S	BW	E/10	18/32	8.00	7.00 - 9.00	10.7	32.6	3527@80	3195@80	48.5	-
	265/70R18	24890008	116T	BW	SL	14/32	8.00	7.00 - 9.00	10.7	32.6	2756@47	-	43.0	660AA
	LT275/65R18	22772512	123/120S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	32.1	3417@80	3085@80	48.5	-
	275/65R18	24531012	116T	BW	SL	14/32	8.00	7.50 - 9.50	11.0	32.1	2756@47	-	45.2	660AA
	LT275/70R18	22797015	125/122S	BW	E/10	18/32	8.00	7.00 - 9.00	11.0	33.2	3638@80	3305@80	48.5	-
	LT285/65R18	22799003	125/122S	BW	E/10	18/32	8.50	8.50 - 10.00	11.5	32.6	3638@80	3305@80	48.5	-
	LT285/75R18	22752001	129/126S	BW	E/10	18/32	8.00	7.50 - 9.50	11.3	34.8	4079@80	3750@80	49.6	-
	LT295/70R18	22799902	129/126S	BW	E/10	18/32	8.50	7.50 - 10.00	11.8	34.3	4079@80	3750@80	50.7	-
	LT305/65R18	22799403	128/125R	BW	F/12	18/32	9.00	9.00 - 11.00	12.2	33.6	3968@80	3640@80	50.7	-
20"	35X12.50R20LT	22229511	125R	BW	F/12	18/32	10.00	8.50 - 11.00	12.5	34.5	3638@80	-	61.7	-
	265/50R20	24652009	111T	BW	XL	14/32	8.50	7.50 - 9.50	10.9	30.5	2403@51	-	40.8	660AA
	LT265/60R20	22152113	121/118S	BW	E/10	18/32	8.00	8.00 - 9.50	10.7	32.5	3197@80	2910@80	48.5	-
	LT275/55R20	22401301	120/117S	BW	E/10	18/32	8.50	8.00 - 9.50	11.2	31.9	3086@80	2835@80	49.6	-
	275/55R20	24660009	117T	BW	SL	14/32	8.50	7.50 - 9.50	11.2	31.9	2833@51	-	45.2	660AA
	LT275/60R20	22466009	123/120S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	33.0	3417@80	3085@80	49.6	-
	275/60R20	24466010	115T	BW	SL	14/32	8.00	7.00 - 9.50	11.0	33.0	2679@47	-	46.3	660AA
	LT275/65R20	22689318	126/123S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	34.1	3748@80	3415@80	57.3	-
	LT285/55R20	22401512	122/119T	BW	E/10	18/32	8.00	8.50 - 10.00	11.7	32.4	3307@80	3000@80	49.6	-
	LT285/60R20	22799502	125/122R	BW	E/10	18/32	8.50	8.50 - 10.00	11.5	33.5	3638@80	3305@80	49.6	-
	LT285/65R20	22689401	127/124S	BW	E/10	18/32	8.50	8.50 - 10.00	11.5	34.6	3858@80	3525@80	45.2	-
	LT295/60R20	22935006	126/123S	BW	E/10	18/32	8.50	8.50 - 10.50	11.8	33.9	3748@80	3415@80	47.4	-
	LT295/65R20	-	129/126S	-	E/10	-	-	-	-	-	-	-	-	-
	LT305/55R20	22789711	125/122S	BW	F/12	18/32	9.50	9.00 - 11.00	12.4	33.2	3638@80	3305@80	58.4	-
LT325/60R20	-	126/123S	-	E/10	-	-	-	-	-	-	-	-	-	
22"	33X12.50R22LT	22229706	109R	BW	E/10	18/32	10.00	8.50 - 11.00	12.5	32.5	2271@65	-	45.2	-
	35X12.50R22LT	22229705	121Q	BW	F/12	18/32	10.00	8.50 - 11.00	12.5	34.5	3197@80	-	45.2	-
	285/45R22	24459903	114H	BW	XL	14/32	9.50	9.00 - 10.50	11.2	32.1	2601@51	-	44.1	660AA

* UTQG for non-LT sizing only.

† This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

‡ Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

• Coming Soon

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

PATAGONIA A/T R

· RUGGED ALL-TERRAIN · LT / SUV

Designed to balance on-road mannerisms with off-road toughness, the PATAGONIA A/T R offers the best of both worlds. Rugged and durable, it incorporates a new tread pattern ready to conquer any condition and all terrains. The tread design promotes superior traction on and off the road and during inclement conditions. Offset tread blocks, with an alternating open shoulder design, adds biting edges for superior all-weather traction. Staggered step-down grooves provide tread rigidity that enhances driving stability and protects the tire from stone drilling, with an advanced cut-and-chip resistant silica-infused tread compound for maximum grip and longer tread life. M+S rated, available in popular high-flotation aftermarket sizes, and carrying a 50K Mile Limited Warranty, the PATAGONIA A/T R is ready to kick-start your adventure.

50K
MILE LIMITED
WARRANTY

540AA
540AB
UTQG*



PERFORMANCE RATINGS†

DRY HANDLING

TREAD LIFE

WET PERFORMANCE

SNOW PERFORMANCE

RIDE COMFORT

OFF-ROAD PERFORMANCE

QUIET RIDE



CUT-AND-CHIP COMPOUND

Compound formulated to withstand abuse from rocks and gravel in rough conditions.



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



WET TRACTION

Elaborate siping and enhanced tread design allows for superior water dispersion.



EXTREME TERRAIN

Aggressive design and large voids to effectively navigate rough conditions.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	31X10.50R15LT	22285028	109Q	BW	C/6	16/32	8.50	7.00 - 9.00	10.6	30.5	2270@50	-	46.3	-
	LT235/75R15	22870004	104/101Q	BW	C/6	14/32	6.50	6.00 - 7.00	9.3	28.9	1985@50	1820@50	39.2	-
	LT215/85R16	22860026	115/112Q	BW	E/10	14/32	6.00	5.50 - 7.00	8.5	30.4	2680@80	2470@80	42.8	-
	LT225/75R16	22756007	115/112Q	BW	E/10	14/32	6.00	6.00 - 7.00	8.8	29.3	2680@80	2470@80	42.5	-
	LT235/85R16	22270049	120/116Q	BW	E/10	16/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	49.1	-
16"	LT245/70R16	22110003	118/115R	BW	E/10	16/32	7.00	6.50 - 7.50	9.8	29.5	2910@80	2680@80	44.8	-
	LT245/75R16	22275051	120/116Q	BW	E/10	16/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	48.6	-
	LT265/70R16	22120003	121/118R	BW	E/10	16/32	8.00	7.00 - 8.50	10.7	30.6	3195@80	2910@80	48.7	-
	265/70R16	24272016	112T	BW	SL	13/32	8.00	7.00 - 8.50	10.7	30.6	2469@44	-	41.6	540AB
	LT265/75R16	22279045	123/120Q	BW	E/10	16/32	7.50	7.00 - 8.00	10.5	31.7	3415@80	3085@80	51.6	-
	265/75R16	24773010	116T	BW	SL	13/32	7.50	7.00 - 8.00	10.5	31.7	2756@44	-	43.0	540AB
	LT285/75R16	22789017	126/123Q	BW	E/10	16/32	8.00	7.50 - 9.00	11.3	32.8	3750@80	3415@80	58.7	-
17"	35X12.50R17LT	22229003	121Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	34.5	3195@65	-	64.4	-
	37X12.50R17LT	22050501	124Q	BW	D/8	16/32	10.00	8.50 - 11.00	12.5	36.5	3525@50	-	71.6	-
	LT235/80R17	22275010	120/117Q	BW	E/10	16/32	6.50	6.00 - 7.50	9.3	31.8	3085@80	2835@80	49.4	-
	245/65R17	24552518	107T	BW	SL	13/32	7.00	7.00 - 8.00	9.8	29.5	2149@44	-	38.0	540AB
	LT245/70R17	22269013	119/116Q	BW	E/10	16/32	7.00	6.50 - 8.00	9.8	30.6	3000@80	2755@80	48.4	-
	245/70R17	22689103	114T	BW	XL	13/32	7.00	6.50 - 8.00	9.8	30.6	2601@51	-	39.0	540AA
	LT245/75R17	22275512	121/118Q	BW	E/10	16/32	7.00	6.50 - 7.50	9.8	31.5	3195@80	2910@80	48.3	-
	265/65R17	24689014	112T	BW	SL	13/32	8.00	7.50 - 9.50	10.7	30.6	2469@44	-	41.5	540AB
	LT265/70R17	22810014	121/118S	BW	E/10	16/32	8.00	7.00 - 8.50	10.7	31.7	3195@80	2910@80	53.3	-
	265/70R17	22810015	115T	BW	SL	13/32	8.00	7.00 - 8.50	10.7	31.7	2679@44	-	43.6	540AA
	LT275/70R17	22139001	121/118R	BW	E/10	16/32	8.00	7.00 - 8.50	11.0	32.2	3195@80	2910@80	57.2	-
	LT285/70R17	22688011	121/118Q	BW	E/10	16/32	8.50	7.50 - 9.00	11.5	32.8	3195@80	2910@80	60.0	-
285/70R17	24695003	117T	BW	SL	13/32	8.50	7.50 - 9.00	11.5	32.8	2833@44	-	47.2	540AB	
LT315/70R17	22801004	121/118Q	BW	E/10	16/32	9.50	8.00 - 11.00	12.7	34.4	3195@65	2910@65	65.9	-	



OFFSET TREAD BLOCKS

Adds biting edges for superior all-weather traction on both on and off-road environments.



STAGGERED STEP-DOWN GROOVE

Provides tread rigidity, enhancing stability and handling while protecting the groove from stone drilling.



VARIABLE DEPTH SIPING

Designed to provide performance consistency throughout the life of the tire.



ANGLED TREAD NOTCHES

Provides increased void and surface area for superior mud and winter traction.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
18"	35X12.50R18LT	22229251	123Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	34.5	3415@65	-	62.9	-
	265/60R18	24583306	114T	BW	XL	13/32	8.00	7.50 - 9.50	10.7	30.5	2601@51	-	41.9	540AB
	265/65R18	24651004	114T	BW	SL	13/32	8.00	7.50 - 9.50	10.7	31.5	2601@44	-	43.7	540AB
	LT275/65R18	22772506	123/120S	BW	E/10	16/32	8.00	7.50 - 9.00	11.0	32.1	3415@80	3085@80	54.5	-
	275/65R18	22772504	116T	BW	SL	12/32	8.00	7.50 - 9.00	11.0	32.1	2756@44	-	42.9	540AA
	LT275/70R18	22797006	125/122S	BW	E/10	16/32	8.00	7.00 - 9.00	11.0	33.2	3640@80	3305@80	56.1	-
20"	LT285/65R18	22402001	125/122S	BW	E/10	16/32	8.50	8.00 - 10.00	11.5	32.6	3640@80	3305@80	59.7	-
	33X12.50R20LT	22229100	114Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	32.5	2600@65	-	62.3	-
	35X12.50R20LT	22229502	121Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	34.5	3195@65	-	65.3	-
	LT265/60R20	22152110	121/118R	BW	E/10	16/32	8.00	7.50 - 9.50	10.7	32.5	3195@80	2910@80	58.1	-
	275/55R20	22520005	117T	BW	XL	12/32	8.50	7.50 - 9.50	11.2	31.9	2833@51	-	41.5	540AA
	275/60R20	22466007	115T	BW	SL	12/32	8.00	7.50 - 9.50	11.0	33.0	2679@44	-	43.4	540AA
	LT275/65R20	22689310	126/123Q	BW	E/10	16/32	8.00	7.50 - 9.50	11.0	34.1	3750@80	3415@80	58.1	-
	LT285/55R20	22401506	122/119R	BW	E/10	16/32	9.00	8.00 - 10.00	11.7	32.4	3305@80	3000@80	60.8	-
	LT305/55R20	22789705	121/118S	BW	E/10	16/32	9.50	8.50 - 11.00	12.4	33.2	3195@65	2910@65	64.6	-
	LT325/60R20	22143001	126/123R	BW	E/10	16/32	9.50	9.00 - 12.00	13.0	35.4	3750@65	3415@65	72.6	-

* UTQG for non-LT sizing only.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

PATAGONIA H/T

· ALL-SEASON HIGHWAY · LT / SUV

The PATAGONIA H/T is the versatile workhorse of the Milestar family, meeting the demand from today's full-size pick-up trucks and SUVs for a dependable, low-maintenance tire. The all-season highway tread design utilizes circumferential ribbing and notching tread blocks that provide a smooth and quiet ride with enhanced wet traction. The all-season tread design includes optimized angled grooves and directional siping for improved inclement-weather handling and stability. Backed by a 60K Mile Limited Warranty, the PATAGONIA H/T is ready for your long haul or any level of duty.

60K
MILE LIMITED
WARRANTY

540AB
UTQG*



PERFORMANCE RATINGS†



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



FITMENTS

Designed for a variety of today's vehicles, including light truck and SUV applications.



DRY TRACTION

Performance-enhanced tread design for improved handling in dry conditions.



WET TRACTION

Elaborate siping and enhanced tread design allows for superior water dispersion.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	P235/75R15	24760020	108T	ROWL	XL	11/32	6.50	6.00 - 8.00	9.3	28.9	2183@50	-	30.8	540AB
	LT235/75R15	22270510	104/101Q	BW	C/6	11/32	6.50	6.00 - 8.00	9.3	28.9	1985@50	1820@50	31.1	-
16"	P215/70R16	24156010	99T	BW	SL	11/32	6.50	5.50 - 7.00	8.7	27.9	1709@44	-	27.4	540AB
	LT215/85R16	22860029	115/112Q	BW	E/10	11/32	6.00	5.50 - 7.00	8.5	30.4	2680@80	2470@80	38.1	-
	P225/70R16	24260007	101T	BW	SL	11/32	6.50	6.00 - 7.00	9.0	28.4	1819@44	-	28.8	540AB
	LT225/75R16	22265027	115/112Q	BW	E/10	12/32	6.00	6.00 - 7.00	8.8	29.3	2680@80	2470@80	37.7	-
	P235/70R16	24265018	104T	ROWL	SL	11/32	7.00	6.00 - 8.00	9.4	29.0	1984@44	-	30.8	540AB
	LT235/85R16	22270051	120/116Q	BW	E/10	13/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	43.6	-
	P245/70R16	24268013	106T	ROWL	SL	12/32	7.00	6.50 - 8.00	9.8	29.5	2094@44	-	33.4	540AB
	P245/75R16	24768010	109T	BW	SL	12/32	7.00	6.50 - 8.00	9.8	30.5	2271@44	-	34.3	540AB
	LT245/75R16	22275053	120/116Q	BW	E/10	13/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	42.7	-
	P255/70R16	24270012	109T	ROWL	SL	12/32	7.50	6.50 - 8.50	10.2	30.1	2271@44	-	35.7	540AB
	P265/70R16	24272017	111T	ROWL	SL	12/32	8.00	7.00 - 9.00	10.7	30.6	2403@44	-	37.5	540AB
	P265/75R16	24773011	114T	BW	SL	12/32	7.50	7.00 - 8.00	10.5	31.7	2601@44	-	39.2	540AB
17"	LT265/75R16	22279047	123/120Q	BW	E/10	13/32	7.50	7.00 - 8.00	10.5	31.7	3415@80	3085@80	46.4	-
	LT285/75R16	22789021	126/123Q	BW	E/10	13/32	8.00	7.50 - 9.00	11.3	32.8	3750@80	3415@80	52.0	-
	P225/65R17	24557016	100T	BW	SL	11/32	6.50	6.00 - 8.00	9.0	28.5	1764@44	-	29.3	540AB
	P235/65R17	24657015	103T	BW	SL	11/32	7.00	6.50 - 8.50	9.4	29.1	1929@44	-	31.2	540AB
17"	LT235/80R17	22275611	120/117Q	BW	E/10	14/32	6.50	6.00 - 7.50	9.3	31.8	3085@80	2835@80	44.5	-
	P245/65R17	24552520	105T	ROWL	SL	12/32	7.00	7.00 - 8.50	9.8	29.5	2039@44	-	33.5	540AB



ANGLED TREAD NOTCHES

Enhance traction while also reducing noise and improving overall tread life.



WIDE CIRCUMFERENTIAL RIBS

Wide circumferential ribs improve stability, handling, and lateral grip.



LATERAL SIPING

Consistent traction in inclement weather.



STONE EJECTORS

Integrated to protect against stone retention and drilling.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
17"	P245/70R17	24552613	108T	ROWL	SL	12/32	7.00	6.50 - 8.00	9.8	30.6	2205@44	-	35.1	540AB
	LT245/70R17	22269016	119/116Q	BW	E/10	14/32	7.00	6.50 - 8.00	9.8	30.6	3000@80	2755@80	43.7	-
	LT245/75R17	22275513	121/118Q	BW	E/10	14/32	7.00	6.50 - 7.50	9.8	31.5	3195@80	2910@80	45.5	-
	P265/65R17	24689015	110T	BW	SL	12/32	8.00	7.50 - 9.50	10.7	30.6	2337@44	-	36.2	540AB
	P265/70R17	24689217	113T	ROWL	SL	12/32	8.00	7.00 - 9.00	10.7	31.7	2535@44	-	39.2	540AB
	LT265/70R17	22810025	123/120Q	BW	E/10	15/32	8.00	7.00 - 8.50	10.7	31.7	3195@80	2910@80	50.5	-
18"	LT285/70R17	22688019	126/123Q	BW	E/10	14/32	8.50	7.50 - 9.00	11.5	32.8	3195@80	2910@80	53.8	-
	P265/60R18	24583308	109T	BW	SL	11/32	8.00	7.50 - 9.50	10.7	30.5	2271@44	-	36.4	540AB
	P265/65R18	24651005	112T	BW	SL	11/32	8.00	7.50 - 9.50	10.7	31.5	2469@44	-	37.5	540AB
	P265/70R18	24890007	114T	BW	SL	12/32	8.00	7.00 - 9.00	10.7	32.6	2601@44	-	40.1	540AB
	LT265/70R18	22815006	124/121Q	BW	E/10	15/32	8.00	7.00 - 9.00	10.7	32.6	3525@80	3195@80	52.8	-
	P275/65R18	24531009	114T	BW	SL	12/32	8.00	7.50 - 9.00	11.0	32.1	2601@44	-	39.7	540AB
20"	P275/55R20	24660007	111T	BW	SL	12/32	8.50	7.50 - 9.50	11.2	31.9	2403@44	-	40.2	540AB
	P275/60R20	24466008	114T	BW	SL	12/32	8.00	7.50 - 9.50	11.0	33.0	2601@44	-	42.2	540AB
	LT275/65R20	22689312	126/123Q	BW	E/10	15/32	8.00	7.50 - 9.50	11.0	34.1	3750@80	3415@80	58.5	-
22"	P285/45R22	-	-	-	-	-	-	-	-	-	-	-	-	


* UTQG for non-LT sizing only.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

• Coming Soon

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

UTV / SIDE-BY-SIDE TIRE PRODUCT LINE-UP

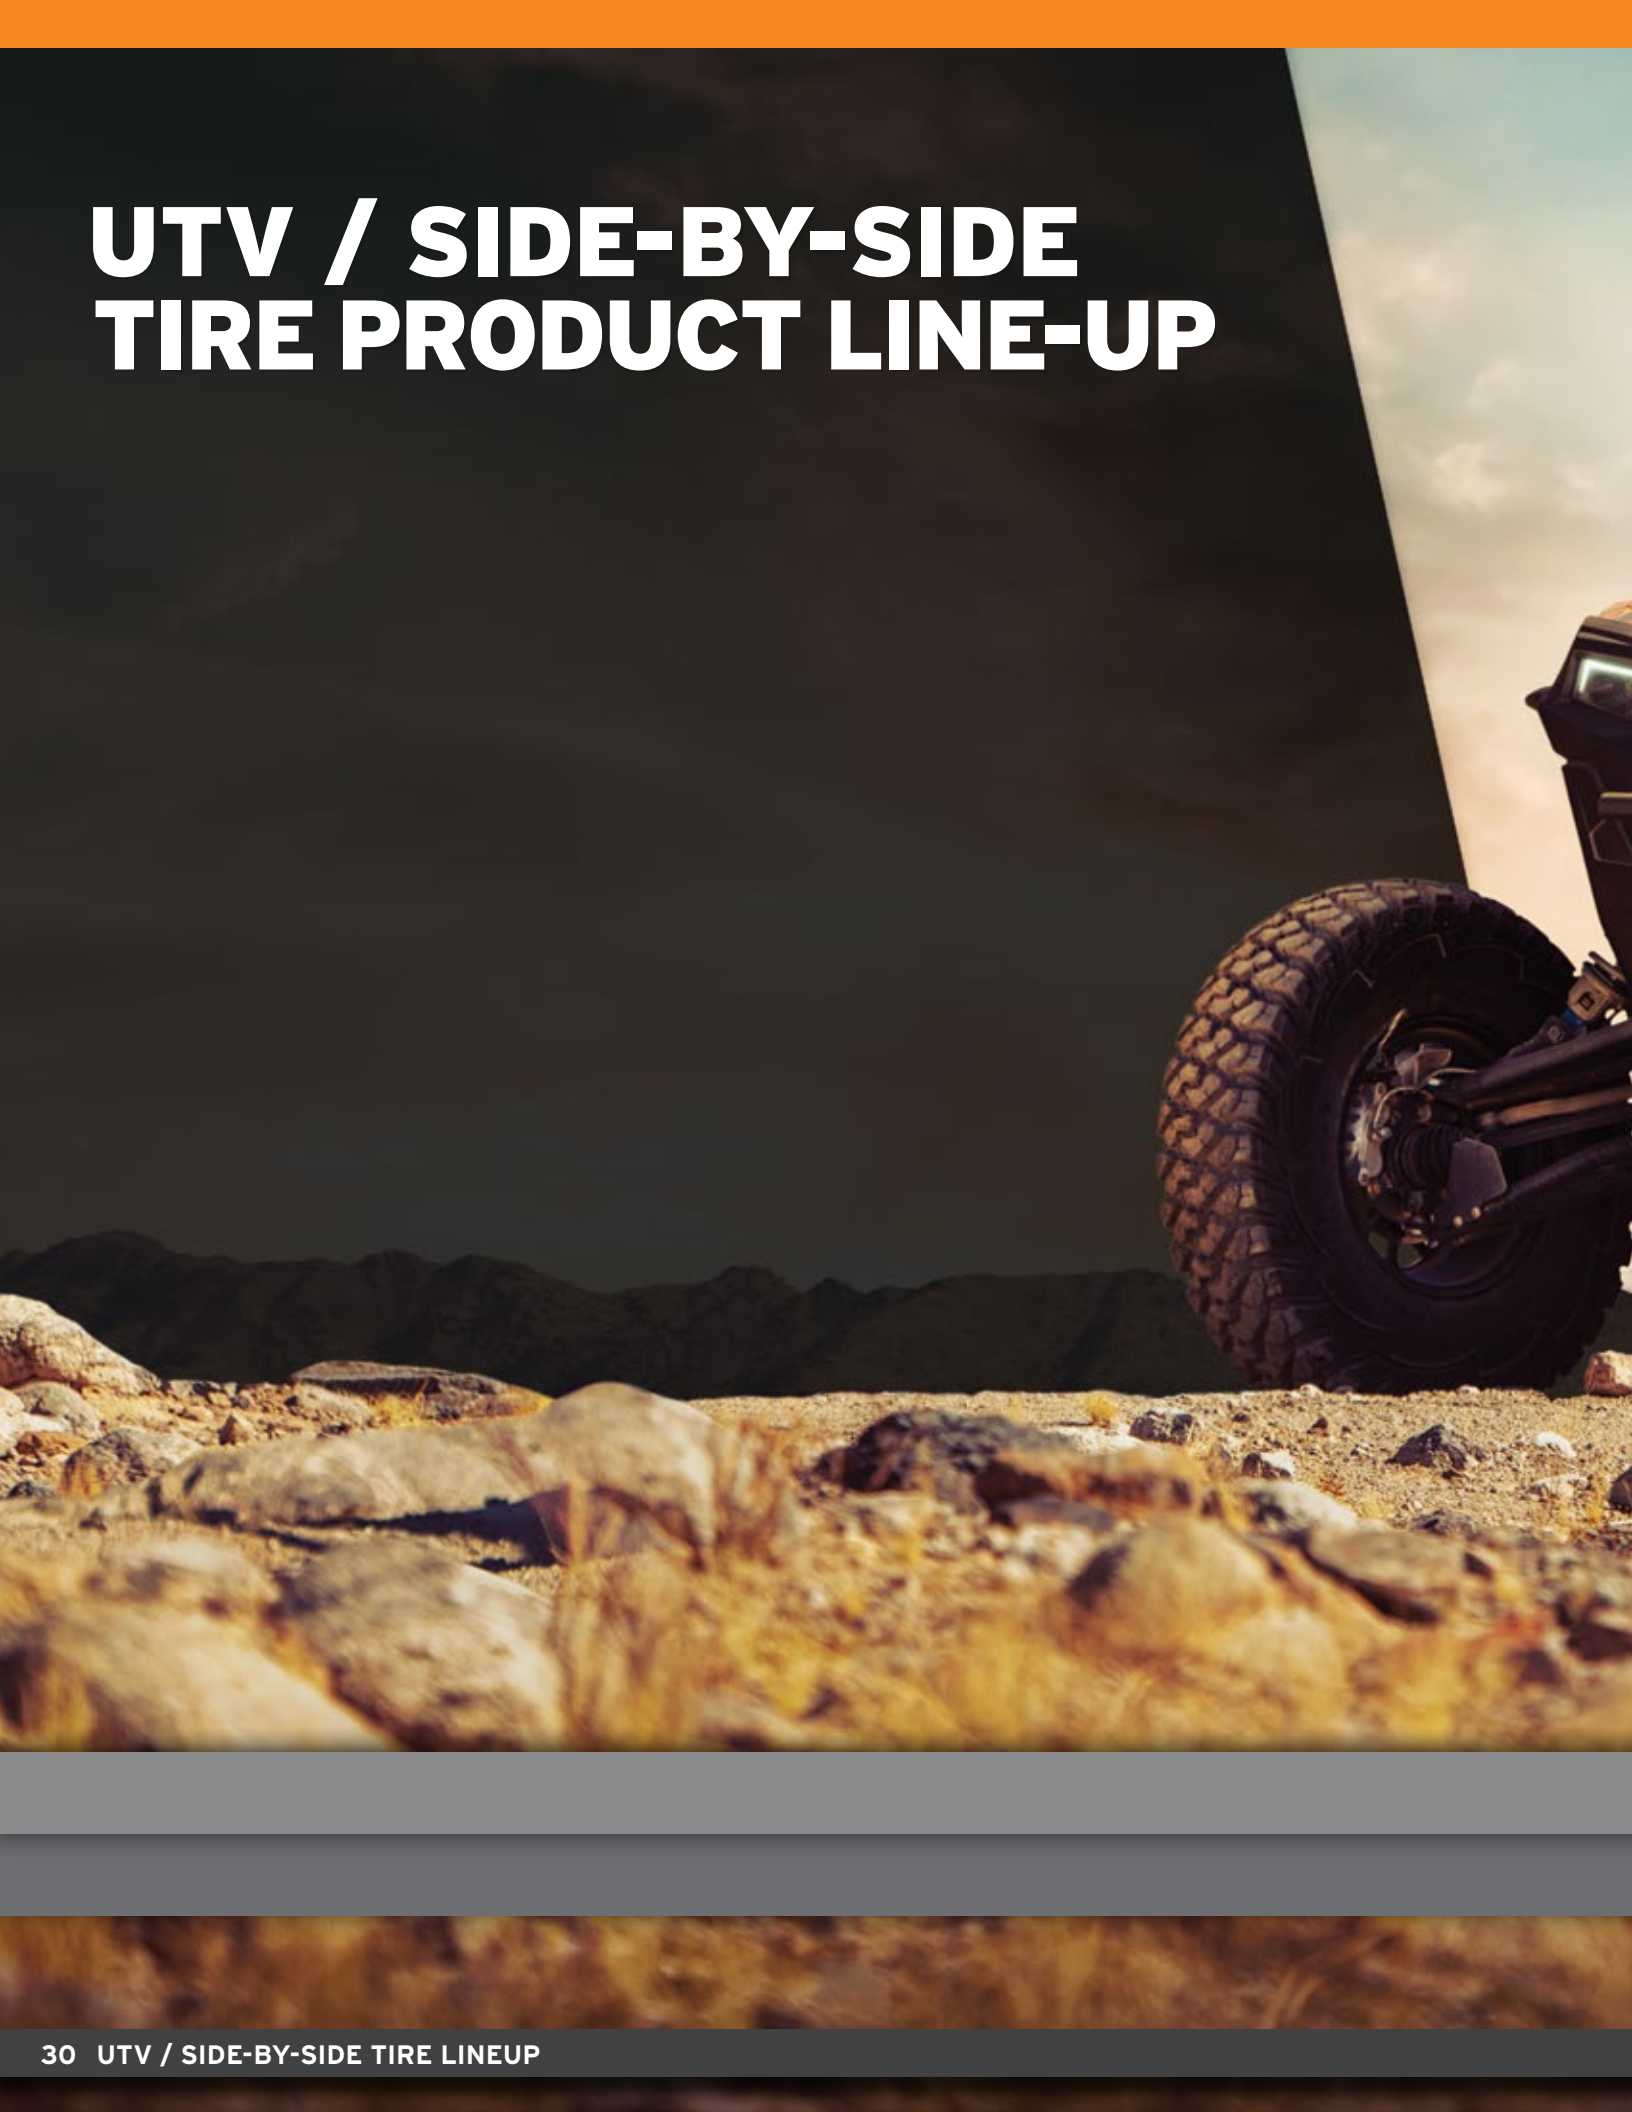



PATAGONIA SXT / SXS

UTV / SIDE-BY-SIDE

SHOWN: 2019 POLARIS® RZR XP TURBO S - PATAGONIA SXT 32X10.00R15

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

PATAGONIA SXT / SXS

· UTV · SIDE-BY-SIDE

The PATAGONIA SXT / SXS tire is engineered specifically for recreational off-road vehicles, such as UTVs and Side-by-Sides, and developed to conquer extremely harsh terrains.

Both the PATAGONIA SXT and SXS are formulated with a cut-and-chip resistant compound, capable of providing competent traction in the silt, sand, and rocks. Deep, wide grooves with stone ejectors help disperse dirt and debris, while overlapping wide tread blocks maintain stability and improve sure-footed control during rapid acceleration and braking.

For added durability and toughness, the PATAGONIA SXT comes constructed with a Kevlar® belt package to enhance strength while keeping the tire's carcass weight as light as possible.

PERFORMANCE RATINGS*

DRY HANDLING 

SNOW PERFORMANCE 

WET PERFORMANCE 

OFF-ROAD PERFORMANCE 

QUIET RIDE 



KEVLAR® (SXT ONLY) BELT PACKAGE

Enhanced strength while keeping the weight as light as possible.



EXTREME TERRAIN

Aggressive design and large voids to effectively navigate rough conditions.



UTV AND SIDE-BY-SIDE

Designed and engineered specifically for off-road use with recreational Utility Task Vehicles / Side-By-Sides.



CUT-AND-CHIP COMPOUND

Compound formulated to withstand abuse from rocks and gravel in rough conditions.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

PATAGONIA SXT (KEVLAR®)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Approximate Weight
14"	28X10.00R14 NHS	30197604	59M	BW	D/8	19/32	8.00	6.00 - 8.50	10.0	28.4	536@22	33.3
	30X10.00R14 NHS	30176004	63M	BW	D/8	19/32	8.00	6.00 - 8.50	10.0	30.4	600@22	37.6
	32X10.00R14 NHS	30657005	68M	BW	D/8	19/32	8.00	6.00 - 8.50	10.2	32.4	694@22	41.4
15"	30X10.00R15 NHS	30167006	63M	BW	D/8	19/32	8.00	6.00 - 8.50	9.9	30.4	600@22	38.5
	32X10.00R15 NHS	30675005	67M	BW	D/8	19/32	8.00	7.00 - 8.50	10.2	32.4	677@22	41.2
	33X10.00R15 NHS	30685002	68M	BW	D/8	19/32	8.00	6.00 - 8.50	10.2	33.4	694@22	43.9
	34X10.00R15 NHS	30293002	72M	BW	D/8	19/32	8.00	6.00 - 8.50	10.3	34.0	783@22	45.4



OPTIMIZED WIDE FOOTPRINT
Enhances handling and braking.



AGGRESSIVE UPPER SIDEWALL
Helps protect the tire from sharp rocks and provide additional off-road traction.



HIGH-CROWN CARCASS
Improved performance in deep sand and silt with improved high-speed handling.



STONE AND MUD EJECTORS
Integrated to protect against stone retention and drilling.

PATAGONIA SXS

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Approximate Weight
14"	28X10.00R14 NHS	30197603	59M	BW	D/8	19/32	8.00	6.00 - 8.50	10.0	28.4	536@22	33.1
	30X10.00R14 NHS	30176003	63M	BW	D/8	19/32	8.00	6.00 - 8.50	10.0	30.4	600@22	37.2
	32X10.00R14 NHS	30657004	68M	BW	D/8	19/32	8.00	6.00 - 8.50	10.2	32.4	694@22	41.9
15"	30X10.00R15 NHS	30167005	63M	BW	D/8	19/32	8.00	6.00 - 8.50	9.9	30.4	600@22	38.1
	32X10.00R15 NHS	30675004	67M	BW	D/8	19/32	8.00	7.00 - 8.50	10.2	32.4	677@22	41.1

Shown: Patagonia SXT

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

COMMERCIAL LT / VAN TIRE PRODUCT LINE-UP



STEELPRO MS597

PROFESSIONAL SERIES
HEAVY DUTY LIGHT TRUCK



STEELPRO MS597S

PROFESSIONAL SERIES
COMMERCIAL VAN / SPRINTER



STEELPRO AST

PROFESSIONAL SERIES
ALL-STEEL TRAILER

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.


STEELPRO MS597

· PROFESSIONAL SERIES · HEAVY DUTY LIGHT TRUCK

The STEELPRO MS597 represents all-encompassing durability at its finest. The steel-belted STEELPRO MS597 is formulated using superior compounds and advanced load-carrying designs in order to endure miles of heavy-duty driving. Circumferential traction ribs and stiff solid shoulders with gripping edges deliver incomparable traction and biting grip. Strong sidewalls ensure a higher maximum load capacity while also combating wear damage.

40K
MILE LIMITED
WARRANTY

PERFORMANCE RATINGS*

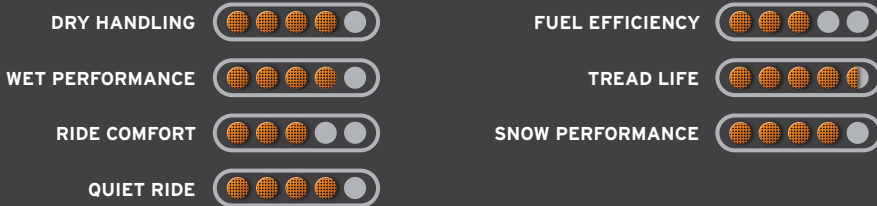

ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



PROFESSIONAL SERIES
Engineered for heavy load use specific to commercial applications.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
16"	LT215/85R16	22860030	115/112Q	BW	E/10	12/32	6.00	5.50 - 7.00	8.5	30.4	2679@80	2469@80	36.2
	LT225/75R16	22265030	115/112Q	BW	E/10	12/32	6.00	6.00 - 7.00	8.8	29.3	2679@80	2469@80	34.7
	LT235/85R16	22270055	120/116Q	BW	E/10	13/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	40.0
	LT245/75R16	22275056	120/116Q	BW	E/10	13/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	39.6
	LT265/75R16	22279053	123/120Q	BW	E/10	13/32	7.50	7.00 - 8.00	10.5	31.7	3417@80	3086@80	42.9



DURABLE RIBBED SHOULDER DESIGN

Provides greater stability and reduces irregular wear.



DEEP ZIGZAG GROOVES

Promotes rapid water evacuation and improves traction and stability even under heavy loads.



STONE EJECTORS

Integrated to protect against stone retention and drilling.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
16.5"	8.75R16.5LT	22072006	115/111R	BW	E/10	13/32	6.75	6.60 - 8.00	9.5	30.6	2679@80	2403@80	-
	9.50R16.5LT	22065006	121/117R	BW	E/10	13/32	6.75	6.80 - 8.30	8.8	29.5	3197@80	2833@80	-

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.


STEELPRO MS597S

· PROFESSIONAL SERIES · COMMERCIAL VAN / SPRINTER

The STEELPRO MS597S meets the growing demands of the commercial van segment. The MS597S is engineered with an enhanced 2-ply sidewall construction built with extra load fitments, as well as load ranges D and E to support greater demands for commercial applications. The tread pattern integrates an aggressive highway rib design, delivering long-lasting treadwear, while the stone ejectors within the grooves protect against stone retention and drilling. The MS597S has a comfortable and quiet design, performs great in wet-weather conditions, and comes with a 40K Mile Limited Warranty. The MS597S is ready for most commercial applications, professional fleet, and contractor duties.

40K
MILE LIMITED
WARRANTY

PERFORMANCE RATINGS*

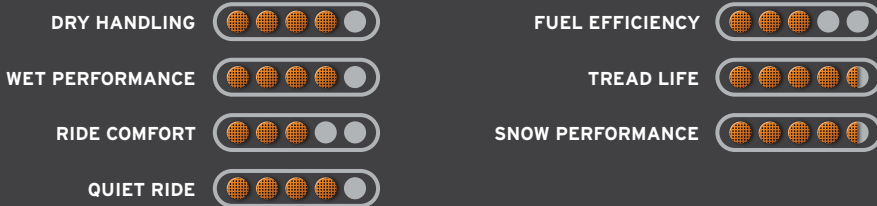

ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



PROFESSIONAL SERIES
Engineered for heavy load use specific to commercial applications.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
15"	185/60R15C†	23616001	94/92S	BW	C/6	12/32	5.50	5.00 - 6.50	7.4	23.7	1477@54	1389@54	21.3
	205/65R15C†	23540001	102/100S	BW	C/6	13/32	6.00	5.50 - 7.50	8.2	25.5	1874@54	1764@54	24.5



AGGRESSIVE HIGHWAY RIB AND TREAD

Aggressive highway rib and tread optimize heavy-load traction and handling for commercial and professional use.



HEAVY DUTY

C designation designed for higher PSI, heavier loads, and commercial use.



SIPING

Added siping for enhanced grip due to lighter commercial loads and scrubbing.



STONE EJECTORS

Integrated to protect against stone retention and drilling.

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
16"	195/75R16C‡	23112001	107/105R	BW	D/8	13/32	5.50	5.00 - 6.00	7.7	27.5	2150@69	2039@69	-
	235/65R16C‡	23676001	121/119R	BW	E/10	13/32	7.00	6.50 - 8.50	9.4	28.0	3197@83	2998@83	-

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

‡ C denotes Commercial, not Ply Rating.


Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

STEELPRO AST

· PROFESSIONAL SERIES · ALL-STEEL TRAILER

Designed to provide long-lasting, reliable performance and exceptional durability, the **STEELPRO AST** has the ability to take on a variety of demanding applications. The **STEELPRO AST** boasts maximum strength and durability thanks to an all-steel casing that is made to withstand road abuse. Four circumferential grooves with stone ejectors evacuate water, dirt, and rocks to enhance traction in all conditions. With the support of a solid center circumferential rib, the **STEELPRO AST** also maintains stability and responsive handling at highway speeds. If you're looking for a tire that can withstand the challenges of hauling, the **STEELPRO AST** is the perfect choice.

PERFORMANCE RATINGS*

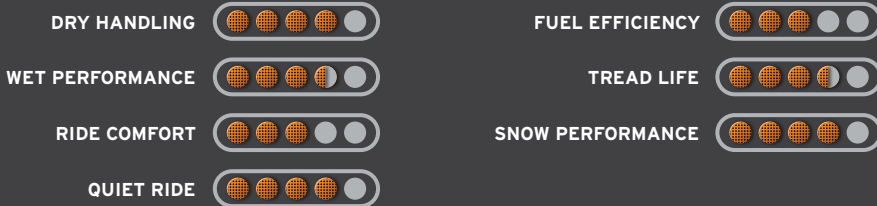

DURABILITY

All-steel casing made to withstand road abuse.



TRAILER SERVICE

Designed for a variety of commercial and towing applications.



PROFESSIONAL SERIES

Engineered for heavy load use specific to commercial applications.



SOLID CENTER CIRCUMFERENTIAL RIB

Solid center circumferential rib enhances lateral stability and improves handling.



ALL-STEEL COMMERCIAL CASING

All-steel casing resists cuts and scrapes to provide maximum strength and durability.



WIDE CIRCUMFERENTIAL GROOVES

Wide circumferential grooves aid in the evacuation of water to reduce hydroplaning.



STONE EJECTORS

Integrated to protect against stone retention and drilling.

[CLICK HERE TO DOWNLOAD CUTSHEET](#)

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight
16"	ST235/85R16	29900008	132/127L	BW	G/14	12/32	6.50	6.00 - 7.50	9.3	31.7	4400@110	3860@110	61.3

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.

STANDARD LIMITED WARRANTY

Every tire, tube and wheel supplied by Tireco is warranted to be free from defects in materials and workmanship subject to the terms, conditions, and limitations as stated below. If our examination of a warrantable product determines that the product has failed due to a defect in materials or workmanship, we will make a reasonable allowance toward the purchase of a new product at current prices or other adjustment within our discretion. Adjustments will be made on a pro-rata basis determined by the amount of usage or service received by the product and will be based on the most recent purchase price (proof of purchase is required).

TERMS, CONDITIONS, AND LIMITATIONS

Any product, no matter how well constructed, may fail in service or become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstance is this Standard Limited Warranty a representation that a tire, tube or wheel failure cannot occur.

WHAT IS COVERED:

In addition to this Standard Limited Mileage Warranty coverage, some Tireco tires are warranted for tread wear during a limit of five years from the installation date.

WHAT IS NOT COVERED:

This Standard Limited Warranty does not cover and Tireco will not adjust any of our products against road hazards (other than the treads specifically mentioned in our Road Hazard Warranty) including, but not limited to: cuts, punctures (whether repairable or not), snags, bruises, tears, impact breaks, etc. Products are also not warranted if damaged due to misuse, including, but not limited to, improper installation or mounting, misapplication, improper repair, overloading, improper inflation, excessive speed, racing, spinning, drifting, unintended off-road use, stone drilling, improper use of chains, use of non-approved or non-standard rims (as determined by the Tire and Rim Association), continued operation while severely under-inflated, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, accident or collision, willful damage, oil or chemical action, improper storage, fire or other excessive heat, vandalism, and water or other material entrapped inside the product.

SPECIFIC TIRE LIMITATIONS AND EXCLUSIONS

- Tire adjustments will be based on the remaining tread depth. Tires worn to 2/32" tread depth or to the treadwear indicator bars are deemed to have served their full useful tread life and are not adjustable for any reason.
- Tires returned for out-of-round or ride disturbance conditions within the first 2/32" of treadwear will be credited for 100% of their value based on the average purchase price for the last six months. Tires returned for out of round beyond the first 2/32 of wear will not be considered for adjustment. Off-road, Agriculture, and Trailer tires are not eligible for out-of-round or ride disturbance consideration.
- Tires that have been branded to note special classifications such as "B" (blemished) may not be considered for adjustment at Tireco's sole discretion.
- Tires marked with an "NA" (nonadjustable) are specifically excluded from this Standard Limited Warranty.
- For tires designed for and used on all classes of recreational vehicles, equipment trailers, horse trailers, cargo trailers and all other trailers; Tireco may require a certified weight ticket for any warranty consideration. Specialty Trailer tires are specifically limited to a warranty of four (4) years from date of manufacture and any allowance made will be based on our Manufacturer's Suggested Retail Price (MSRP).
- Loss of time, or use, inconvenience, or any incidental or consequential damage.
- Tires which have been retreaded (other than those specifically mentioned in our Limited Casing Warranty) or altered in any way are not warranted.
- Tires that do not have a Department of Transportation (DOT) number; tires that fail due to the addition of aftermarket materials (tire fill, sealant, balancer, etc.); tires that have been modified by notching, buffing or cutting; tires returned for weather/ozone cracking after two (2) years from date of purchase; tires with production dates six (6) years and older.

SPECIFIC TUBE LIMITATIONS AND EXCLUSIONS

- Tube adjustments will be considered on a case by case basis and must be claimed within the first 30 days after installation or one year from the date of purchase, whichever comes first.

SPECIFIC WHEEL LIMITATIONS AND EXCLUSIONS

- Cosmetic defects caused by weathering as well as used, reconditioned or blemished wheels are specifically excluded from this Standard Limited Warranty
- Chrome plating and clear coat finishes are warranted against peeling, cracking, and other cosmetic flaws for a period of one (1) year from date of purchase.
- New wheels returned without all of the original packaging material in good condition including the original box will be charged a 15% restocking fee.

HOW TO GET SERVICE:

Each step of the following procedures must be completed in order to qualify for any credit provided by this Standard Limited Warranty:

1. The dealer must contact the Tireco Consumer Relations Department to receive a Return Merchandise Number (RMA) to start the warranty claim process.
 - a. rma@tireco.com
 - b. 1-800-937-9433
2. The dealer must use the Warranty Claim Form provided by Tireco for any adjustments to be considered for credit. The Claim Form must be filled in completely (Tire size, Tread pattern, DOT, Remaining tread, etc).
3. The Consumer Relations Representative will request tire(s) to be sent to one of Tireco's Adjustment Centers at our expense for inspection. Shipping instructions along with an RMA number will be provided.
4. The dealer must send the completed Claim Form and all other documents to the Adjustment Center.
5. Upon receipt of documents and tires, the appropriate Tireco Representative will complete the inspection.
6. If the tire(s) is adjustable, the dealer will be notified and will be issued a credit after which the tire will be destroyed by Tireco.
7. If the tire(s) is not adjustable and does not meet the limited Standard Warranty requirements, the dealer will receive a letter of notification with an explanation. If the tire(s) was requested by the dealer to be returned, the non adjustable tire(s) will be returned at the expense of the dealer. Any tire that the dealer leaves with Tireco will be destroyed without further notice.
8. No credit shall be given until a completed warranty claim form and all documents related to the claim are received by Tireco and the tire is found to be adjustable.
9. Any form that is illegible or incomplete may be returned to the dealer for completion and will delay the application process
10. For any questions or if you need assistance in filling out the forms, please call Tireco consumer relations department 1-800-937-9433 or email us at rma@tireco.com.

PLEASE NOTE:

All tires/wheels returned to Tireco for warranty consideration are subject to inspection. Tires/wheels that are found to not meet the warranty criteria (adjustable) will be disposed of at the time of inspection unless the tires/wheels have been previously requested to be returned. All tires/wheels returned to the dealer/customer will be done at the dealer's/customer's expense.

TO ASK QUESTIONS, REQUEST INFORMATION OR FILE A CLAIM:

Contact our warranty professionals at 1-800-937-9433 or via email at rma@tireco.com. No claim will be considered unless submitted in accordance with our standard claim procedures. Claim forms and all warranty related forms can be found on our website www.tireco.com. All product returns must be accompanied by a completed Return Material Authorization (RMA) form and number. Products submitted without prior authorization will not be processed and are subject to freight chargeback.

YOUR RIGHTS UNDER STATE LAW:

All implied warranties, including any warranty of merchantability or fitness for a particular purpose, are expressly limited to the duration of this Standard Limited Warranty. All obligations or liabilities for indirect, incidental or consequential damages are hereby excluded to the extent permitted by law, including economic loss, loss of profit, loss of use of vehicle, loss of time, inconvenience, personal injury or death. Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply. This Standard Limited Warranty gives the customer legal rights that may vary from state/province to state/province. This Standard Limited Warranty, the Standard Limited Mileage Warranty, and the Limited Casing Warranty are the only express warranties applicable to items sold by Tireco, and supersede the terms of any previous warranty.

STANDARD LIMITED MILEAGE WARRANTY

WHAT IS COVERED:

In addition to this Standard Limited Mileage Warranty coverage, some Tireco tires are warranted for tread wear during a limit of five years from the installation date. See Standard Limited Warranty for warranty details. This Standard Limited Mileage Warranty only applies to select new Passenger & Light Truck tire lines listed below:

40K MILE WARRANTY	50K MILE WARRANTY	55K MILE WARRANTY	60K MILE WARRANTY	70K MILE WARRANTY	80K MILE WARRANTY
STREETSTEEL	INTERCEPTOR AS810	PATAGONIA A/T PRO	PATAGONIA H/T	WEATHERGUARD AS710 (H and V speed ratings)	WEATHERGUARD AS710 (T-speed ratings)
MS775 TOURING SLE	MS932 SPORT				
MS70 ALL-SEASON	WEATHERGUARD AW365				
STEELPRO MS597	PATAGONIA A/T R				
STEELPRO MS597S					
PATAGONIA X/T					

LIMITED MILEAGE WARRANTY:

If within five (5) years from the date of installation, the tire wears evenly across the tread down to the tread wear indicators (2/32nds of an inch of tread remaining) before providing the minimum warranted miles of service as indicated by the vehicle odometer, a credit will be issued toward the purchase of a new tire on a pro rated basis to the actual mileage received. The mileage received will be based on the current vehicle mileage on the odometer compared to the vehicle mileage at the time of new tire installation, which must be listed on the original tire invoice and the new tire invoice.

Tires which wear out evenly before delivering the warranted mileage will be replaced on a pro rated basis only if:

- You are the original purchaser of the tires and you still own the vehicle on which they were originally installed. The tires must have only been used on that vehicle.
- The tires have been rotated and inspected by any authorized tire dealer every 5,000 miles, and the Mounting and Rotation service record has been fully completed and signed by the dealer (the form is available here). Improper or incorrectly performed maintenance or repair that causes damage to the tires may void this warranty.
- The tires were originally registered online at www.tireco.com/registration.
- The completed service record form, Tire Installation Information Form, and the Original invoices are presented to the authorized tire dealer at the time of mileage warranty claim. These forms can be found on our website at www.milestartires.com or contact our Consumer Relations Department at 800-937- 9433.

HOW TO GET SERVICE:

Each step of the following procedures must be completed in order to qualify for any credit provided by this Standard Limited Mileage Warranty:

1. The dealer/customer must contact the Tireco Consumer Relations Department to receive a Return Merchandise Number (RMA) to start the mileage warranty claim process.
 - a. rma@tireco.com
 - b. 1-800-937-9433
2. The dealer/customer must use the Warranty Claim Form provided by Tireco for any adjustments to be considered for credit. The Claim Form must be filled in completely (Tire size, Tread pattern, DOT, Remaining tread, etc).
3. To obtain mileage proration adjustments the dealer/customer must have completed the Tire Installation Form and provide proof of original purchase for the claim tires(s) that states the vehicle mileage at the time of the original installation.
4. Dealer/customer must obtain proof that the tires have been rotated every 5,000 miles and complete and sign Tireco's Mounting and Rotation Service Record (For Mileage Warranty) Form.
5. The Consumer Relations Representative will request tire(s) to be sent to one of Tireco's Adjustment Centers at our expense for inspection. Shipping instructions along with an RMA number will be provided.

6. The dealer/customer must send the completed Claim Form and all other documents for the mileage warranty with Tires to the Adjustment Center.
7. Upon receipt of documents and tires, the appropriate Tireco Representative will complete the inspection.
8. If the tire(s) is adjustable, the dealer/customer will be notified and will be issued a credit after which the tire will be destroyed by Tireco.
9. If the tire(s) is not adjustable and does not meet the limited mileage requirements, the dealer/customer will receive a letter of notification with an explanation. If the tire(s) was requested by the dealer/customer to be returned, the non adjustable tire(s) will be returned at the expense of the dealer/customer. Any tire that the dealer/customer leaves with Tireco will be destroyed without further notice.
10. No credit shall be given until a completed warranty claim form and all documents related to the claim are received by Tireco and the tire is found to be adjustable.
11. Any form that is illegible or incomplete may be returned to the dealer/customer for completion and will delay the application process.
12. For any questions or if you need assistance in filling out the forms, please call Tireco consumer relations department 1-800-937-9433 or email us at rma@tireco.com.

PLEASE NOTE:

All tires/wheels returned to Tireco for warranty consideration are subject to inspection. Tires/wheels that are found to not meet the warranty criteria (adjustable) will be disposed of at the time of inspection unless the tires/wheels have been previously requested to be returned. All tires/wheels returned to the dealer/customer will be done at the dealer's/customer's expense.

TO ASK QUESTIONS, REQUEST INFORMATION, OR FILE A CLAIM:

Contact our warranty professionals at 1-800-937-9433 or via email at rma@tireco.com. No claim will be considered unless submitted in accordance with our standard claim procedures. Claim forms and all warranty related forms can be found on our website www.tireco.com and www.milestartires.com. All product returns must be accompanied by a completed Return Material Authorization (RMA) form and number. Products submitted without prior authorization will not be processed and are subject to freight chargeback.

YOUR RIGHTS UNDER STATE LAW:

All implied warranties, including any warranty of merchantability or fitness for a particular purpose, are expressly limited to the duration of this Standard Limited Mileage Warranty. All obligations or liabilities for indirect, incidental or consequential damages are hereby excluded to the extent permitted by law, including economic loss, loss of profit, loss of use of vehicle, loss of time, inconvenience, personal injury or death. Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply. This Standard Limited Mileage Warranty gives the customer legal rights that may vary from state/province to state/province. This Standard Limited Mileage Warranty, the Limited Casing Warranty, and the Standard Limited Warranty are the only express warranties applicable to items sold by Tireco, and supersede the terms of any previous warranty.



30 DAY RIDE GUARANTEE PROGRAM

Milestar is offering a 30 Day Ride Guarantee on the following eligible Milestar passenger and light truck tires:

- INTERCEPTOR AS810
- WEATHERGUARD AS710 SPORT
- WEATHERGUARD AW365
- MS932 SPORT
- PATAGONIA A/T PRO
- PATAGONIA A/T R
- PATAGONIA H/T

If for any reason, you are not satisfied with your new set of four (4) eligible Milestar tires within 30 days of purchase, you may return them to the original place of purchase for a new set of tires (limited to the purchase price of the tires). Please see your participating Milestar Dealer for full details.

REQUIREMENTS AND LIMITATIONS

- 30 Day Ride Guarantee applies to 4 or more tires per vehicle (Purchase of less than 4 tires are not eligible).
- All eligible tires must be purchased and mounted on the vehicle the same day.
- Tires must be purchased from a participating Authorized Milestar Dealer.
- If the exchange is for a more expensive tire, you agree to pay the difference (including sales tax).
- Tires must be returned undamaged. Tires exhibiting misuse, road hazard, mounting damage, vehicle mechanical-related problems, repairs, improper inflation, vandalism, run flat and/or any racing activity wear are excluded from this trial warranty.
- Replacement tire(s) must be installed on original purchase vehicle.
- This offer is available only to the original purchaser and is nontransferable.
- Original purchaser must provide valid proof of purchase within 30 days from date of replacement.
- Replacement must be done at original place of purchase.
- Other service charges or applicable taxes are not included.
- Online purchases are not eligible.

DISCLAIMER

EXCEPT AS EXPRESSLY PROVIDED HEREIN, THIS WARRANTY, OR ANY WARRANTY STATED OR REFERRED TO HEREIN, IS EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTIES AND REPRESENTATIONS, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND NO OTHER WARRANTY OR REPRESENTATION OF ANY KIND IS MADE BY MILESTAR OR SHALL BE IMPLIED BY LAW.



ROAD HAZARD PROGRAM

Milestar is offering a Road Hazard warranty on the following eligible Milestar passenger and light truck tires:

- INTERCEPTOR AS810
- WEATHERGUARD AS710 SPORT
- WEATHERGUARD AW365
- MS932 SPORT
- PATAGONIA A/T PRO
- PATAGONIA A/T R
- PATAGONIA H/T

Tire must be listed in eligible products for Road Hazard.

Tire must be worn within first 2/32nds of original tread depth or within one year from date of purchase (proof of purchase must be provided), whichever comes first.

Qualifying tires will be replaced free of charge with the same Milestar tire.

Tires must have been purchased through an authorized Milestar dealer and must be returned for replacement to that same dealer.

On-line sales are not eligible.

Taxes, mounting, balancing and service charges on the replacement tires are not included.

WHAT IS COVERED:

- Damage due to cuts, punctures, snags, bruises, tears, impact breaks, etc.
- Products sold in and used on vehicles registered & operated in the United States, U.S. Territories, and Canada.
- Road Hazard Warranty is only available to the original purchaser of the product, and is not transferable.

WHAT IS NOT COVERED:

Damage caused by:

- Fire
- Theft
- Vandalism
- Chemical corrosion
- Accident
- Off-road use
- Stone Drilling
- Improper inflation or improper installation
- Mechanical failures (e.g., failed shocks, struts, alignment, balancing, or similar failure) or interference of Tire with vehicle
- Improper mounting/dismounting practices, abuse, misuse, or neglect
- Repairable punctures are not covered under this warranty

DISCLAIMER

EXCEPT AS EXPRESSLY PROVIDED HEREIN, THIS WARRANTY, OR ANY WARRANTY STATED OR REFERRED TO HEREIN, IS EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTIES AND REPRESENTATIONS, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND NO OTHER WARRANTY OR REPRESENTATION OF ANY KIND IS MADE BY MILESTAR OR SHALL BE IMPLIED BY LAW.



@milestartires



@milestar.tires



milestartires.com